PHILIPS Lighting



MASTER Value GLASS LED candles and lustres

MASTER VLE LEDLusterDT3.4-40W E14 927P45CLG

Featuring a classic heritage design, Classic filament LED Lamps combine the familiar shapes of incandescent candles and lustres with the benefits of the long-lasting LED technology. The product offers more energy saving compared with normal LED candles and lustres, and also provides the customer with a good light experience and superior dimming performance. MASTER Value Glass Led candles and lustres deliver significant energy savings, offering 30% more compared to normal LEDs. They provide excellent quality of light. By offering a lifetime of 15,000 hours, they reduce maintenance costs.

Product data

| General Information | |
|-------------------------------------|-----------------------------------|
| Cap base | E14 [E14] |
| EU RoHS compliant | Yes |
| Nominal lifetime (nom.) | 15000 h |
| Switching cycle | 20,000X |
| | Sphere |
| | |
| Light Technical | |
| Colour Code | 922-927 [CCT of 2,200 K-2,700 K] |
| Luminous flux (nom.) | 470 lm |
| Colour designation | Warm Glow (WG) |
| Correlated Colour Temperature (Nom) | 2200 2700 K |
| Luminous efficacy (rated) (nom.) | 138.00 lm/W |


| Colour consistency | <6 | |
|---|-------------|--|
| Colour rendering index (nom.) | 90 | |
| LLMF at end of nominal lifetime (nom.) 70 % | | |
| | | |
| Operating and Electrical | | |
| Input frequency | 50 to 60 Hz | |
| Power (Rated) (Nom) | 3.4 W | |
| Lamp current (nom.) | 24 mA | |
| Wattage equivalent | 40 W | |
| Starting time (nom.) | 0.5 s | |
| Warm-up time to 60% light (nom.) | 0.5 s | |
| Power factor (nom.) | 0.6 | |
| | | |

MASTER Value GLASS LED candles and lustres

| Voltage (Nom) | 220-240 V |
|------------------------------------|----------------------------|
| | |
| Temperature | |
| T-Case maximum (nom.) | 70 °C |
| | |
| Controls and Dimming | |
| Dimmable | Only with specific dimmers |
| | |
| Mechanical and Housing | |
| Lamp Finish | Clear |
| Bulb shape | P45 [P 45mm] |
| | |
| Approval and Application | |
| Energy Efficiency Class | D |
| Energy consumption kWh/1,000 hours | 4 kWh |


| | 453151 | | |
|-----------------------------------|-----------------------------------|--|--|
| | | | |
| Product Data | | | |
| Full product code | 871951432521000 | | |
| Order product name | MASTER VLE LEDLusterDT3.4-40W E14 | | |
| | 927P45CLG | | |
| EAN/UPC – product | 8719514325210 | | |
| Order code | 32521000 | | |
| SAP numerator – quantity per pack | 1 | | |
| Numerator – packs per outer box | 10 | | |
| SAP material | 929003013102 | | |
| SAP net weight (piece) | 0.014 kg | | |

Dimensional drawing




MASTER VLE LEDLusterDT3.4-40W E14 927P45CLG

Photometric data

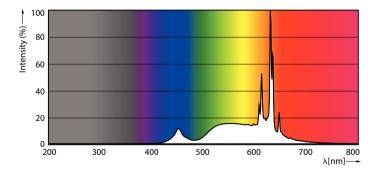

LEDcandle MAS SLR 3,4W B35 E14 927 CL-POC


| Product | D | с |
|---|-------|-------|
| MASTER VLE LEDLusterDT3.4-40W E14 927P45CLG | 45 mm | 80 mm |



LEDLuster MAS SLR P45 3,4W E14 927 CL-LDD


MASTER Value GLASS LED candles and lustres

Photometric data



LEDLuster MAS SLR 3,4W P45 E14 927 CL-GUL

Lifetime

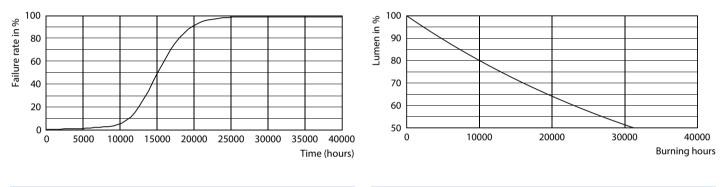

15K LED

15K LMP



© 2021 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2021, December 21 - data subject to change