



## ATLLED2X4/M3

Topline 6 LED Batten Emergency 49W - Cool White



## Features

- High performance LED batten for multi-purpose applications
- Exceeds performance of T5 equivalents
- Steel body construction with powder coat finish
- Unique opal diffuser design for optimum performance and light distribution
- Polycarbonate end caps
- Instant light output with unlimited switching
- Self-test emergency as standard
- LED lifespan L70 36,000 hours
- Non-dimmable

## General Information

Lamp Type	LED
Colour / Finish	White
Emergency	Yes
Self Test	Yes
IP Rating	IP20
Class Protection	1
Internal / External	Internal
Surface / Recessed / Suspended	Surface
Warranty (Years)	5
CE Mark	Yes
Length (mm)	1220
Width (mm)	65
Height (mm)	65

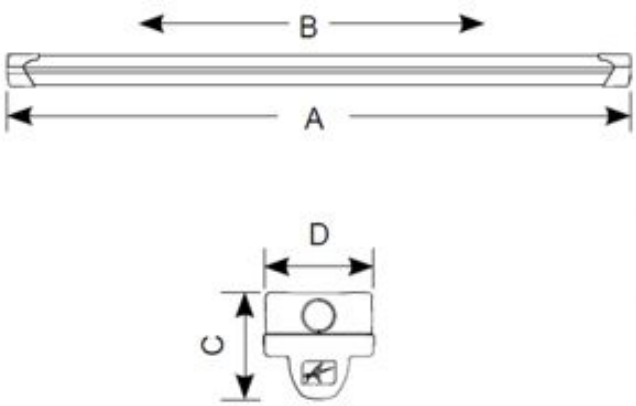
## Technical Information

Wattage	49W
Lumens Delivered	5085lm
Lm/W	104lm
CRI	Ra 80
CCT	4000K
Input	220/240V
Hertz	50Hz
Operating Temp	-10°C to 50°C

## Technical Data - ETIM 6 - Batten luminaire (EC000109)

With light source	Yes
Suitable for number of lamps	1
Lamp power	49 W
Lamp power at multiwatt	Not applicable
Control gear included	Yes
Type of dimming	Not dimmable
Suitable for emergency lighting	Yes
Nominal voltage	220-240 V
Suitable for through-wiring	No
Electrical connection with connector system	No
Material	Steel
Colour housing	White
Length	1220 mm
Width	65 mm
Height	65 mm
Protection class	I
Degree of protection (IP)	IP20
Rated luminous flux acc. IEC 62722-2-1	5085 lm
Colour of light	White
Colour temperature	4000-4000 K
Colour rendering index CRI	80-89

Datasheet generated from <https://www.electrika.com> last updated Monday, May 20, 2019 10:36:25 AM

	Code	A	B	C	D
	<b>ATLLED4</b>	1220	600	65	65
	<b>ATLLED5</b>	1525	600	65	65
	<b>ATLLED6</b>	1745	600	65	65
	<b>ATLLED2X4</b>	1220	600	65	65
	<b>ATLLED2X5</b>	1525	600	65	65
	<b>ATLLED2X6</b>	1745	600	65	65