



ATLLED4/M3

Topline 6 LED Batten Emergency 29W - Cool White



Features

- High performance LED batten for multi-purpose applications
- Exceeds performance of T5 equivalents
- Steel body construction with powder coat finish
- Unique opal diffuser design for optimum performance and light distribution
- Polycarbonate end caps
- Instant light output with unlimited switching
- Self-test emergency as standard
- LED lifespan L70 36,000 hours
- Non-dimmable

General Information

| | |
|--------------------------------|----------|
| Lamp Type | LED |
| Colour / Finish | White |
| Emergency | Yes |
| Self Test | Yes |
| IP Rating | IP20 |
| Class Protection | 1 |
| Internal / External | Internal |
| Surface / Recessed / Suspended | Surface |
| Warranty (Years) | 5 |
| CE Mark | Yes |
| Length (mm) | 1220 |
| Width (mm) | 65 |
| Height (mm) | 65 |

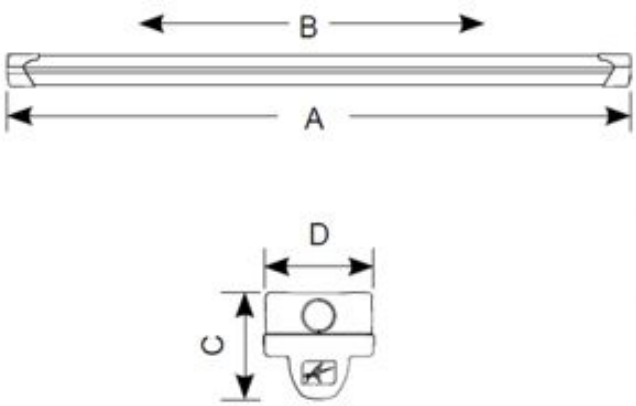
Technical Information

| | |
|------------------|---------------|
| Wattage | 29W |
| Lumens Delivered | 2874lm |
| Lm/W | 99lm |
| CRI | Ra 80 |
| CCT | 4000K |
| Input | 220/240V |
| Hertz | 50Hz |
| Operating Temp | -10°C to 50°C |

Technical Data - ETIM 6 - Batten luminaire (EC000109)

| | |
|---|----------------|
| With light source | Yes |
| Suitable for number of lamps | 1 |
| Lamp power | 29 W |
| Lamp power at multiwatt | Not applicable |
| Control gear included | Yes |
| Type of dimming | Not dimmable |
| Suitable for emergency lighting | Yes |
| Nominal voltage | 220-240 V |
| Suitable for through-wiring | No |
| Electrical connection with connector system | No |
| Material | Steel |
| Colour housing | White |
| Length | 1220 mm |
| Width | 65 mm |
| Height | 65 mm |
| Protection class | I |
| Degree of protection (IP) | IP20 |
| Rated luminous flux acc. IEC 62722-2-1 | 2874 lm |
| Colour of light | White |
| Colour temperature | 4000-4000 K |
| Colour rendering index CRI | 80-89 |

Datasheet generated from <https://www.electrika.com> last updated Monday, May 20, 2019 10:36:25 AM

| | Code | A | B | C | D |
|---|------------------|------|-----|----|----|
|  | ATLLED4 | 1220 | 600 | 65 | 65 |
| | ATLLED5 | 1525 | 600 | 65 | 65 |
| | ATLLED6 | 1745 | 600 | 65 | 65 |
| | ATLLED2X4 | 1220 | 600 | 65 | 65 |
| | ATLLED2X5 | 1525 | 600 | 65 | 65 |
| | ATLLED2X6 | 1745 | 600 | 65 | 65 |