




ATORPLED2X4

Tornado Pro Twin 1.2m 41W

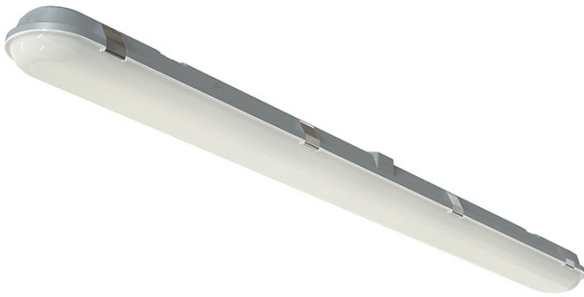

Features

Exceeds performance of standard T5 fluorescent.

Ultra slim IP65 LED NCF linear.

Unique base design caters for multiple installation methods.

Installer friendly imbedded features aid accurate and fast installation for any application.

Quick release LED array/gear tray assembly provides the installer the means to faster installation/maintenance.

Fast latching/permanently located stainless steel side clips ensure a quick and secure connection.

Tridonic LED driver as standard.

LED lifespan L70 30,000 hours.

General Information

Lamp Type	LED
IP Rating	IP65
IK Rating	IK07
Class Protection	1
Internal / External	Internal/External
Surface / Recessed / Suspended	Surface/Suspended
Warranty (Years)	5
CE Mark	Yes
Length (mm)	1265
Width (mm)	115
Height (mm)	70

Technical Information

Wattage	41W
Lumens Delivered	4457lm
Lm/W	109lm
CRI	Ra 80
CCT	4000K
Input	230V
Hertz	50Hz
Operating Temp	-10°C to 40°C

Datasheet generated from <https://www.electrika.com> last updated Wednesday, September 25, 2019 1:49:19 PM

