



AVASLED5/LO/B

Vasco LED CCT Suspended Linear 20W Warm White/Cool White/Daylight - Black



Features

Aluminium bi-directional suspended pendant suitable for education, commercial and retail applications

Aluminium extruded construction with integral driver

Supplied bi-directional light output as standard with 30% upward light and 70% downward light ratio (directional only option can be selected if required)

Opal diffuser provides optimal light uniformity

Selectable CCT between 3000K,4000K and 6000K output

Pre-wired with 1.5 metre cable

Adjustable suspension points c/w suspension kit

1-10V dimmable as standard

General Information


Lamp Type	LED
Colour / Finish	Black
IP Rating	IP20
Class Protection	1
Internal / External	Internal
Surface / Recessed / Suspended	Suspended
Lifetime (Hrs)	L90 36,000
Warranty (Years)	3
CE Mark	Yes
Length (mm)	1504
Width (mm)	55
Height (mm)	75
Accessories	AVASLED/LC, AVASLED/90, AVASLED/90/B

Technical Information

Wattage	20W
Lumens Delivered	2000lm (4000K)
Lm/W	103lm (4000K)
Beam Angle	105
CRI	Ra 80
CCT	3000K/4000K/6000K
Input	220-240V
Hertz	50/60Hz
Operating Temp	-20°C to 45°C
SDCM	6
UGR	20

Datasheet generated from <https://onetimepim.com> last updated Tuesday, July 5, 2022 2:23:24 PM




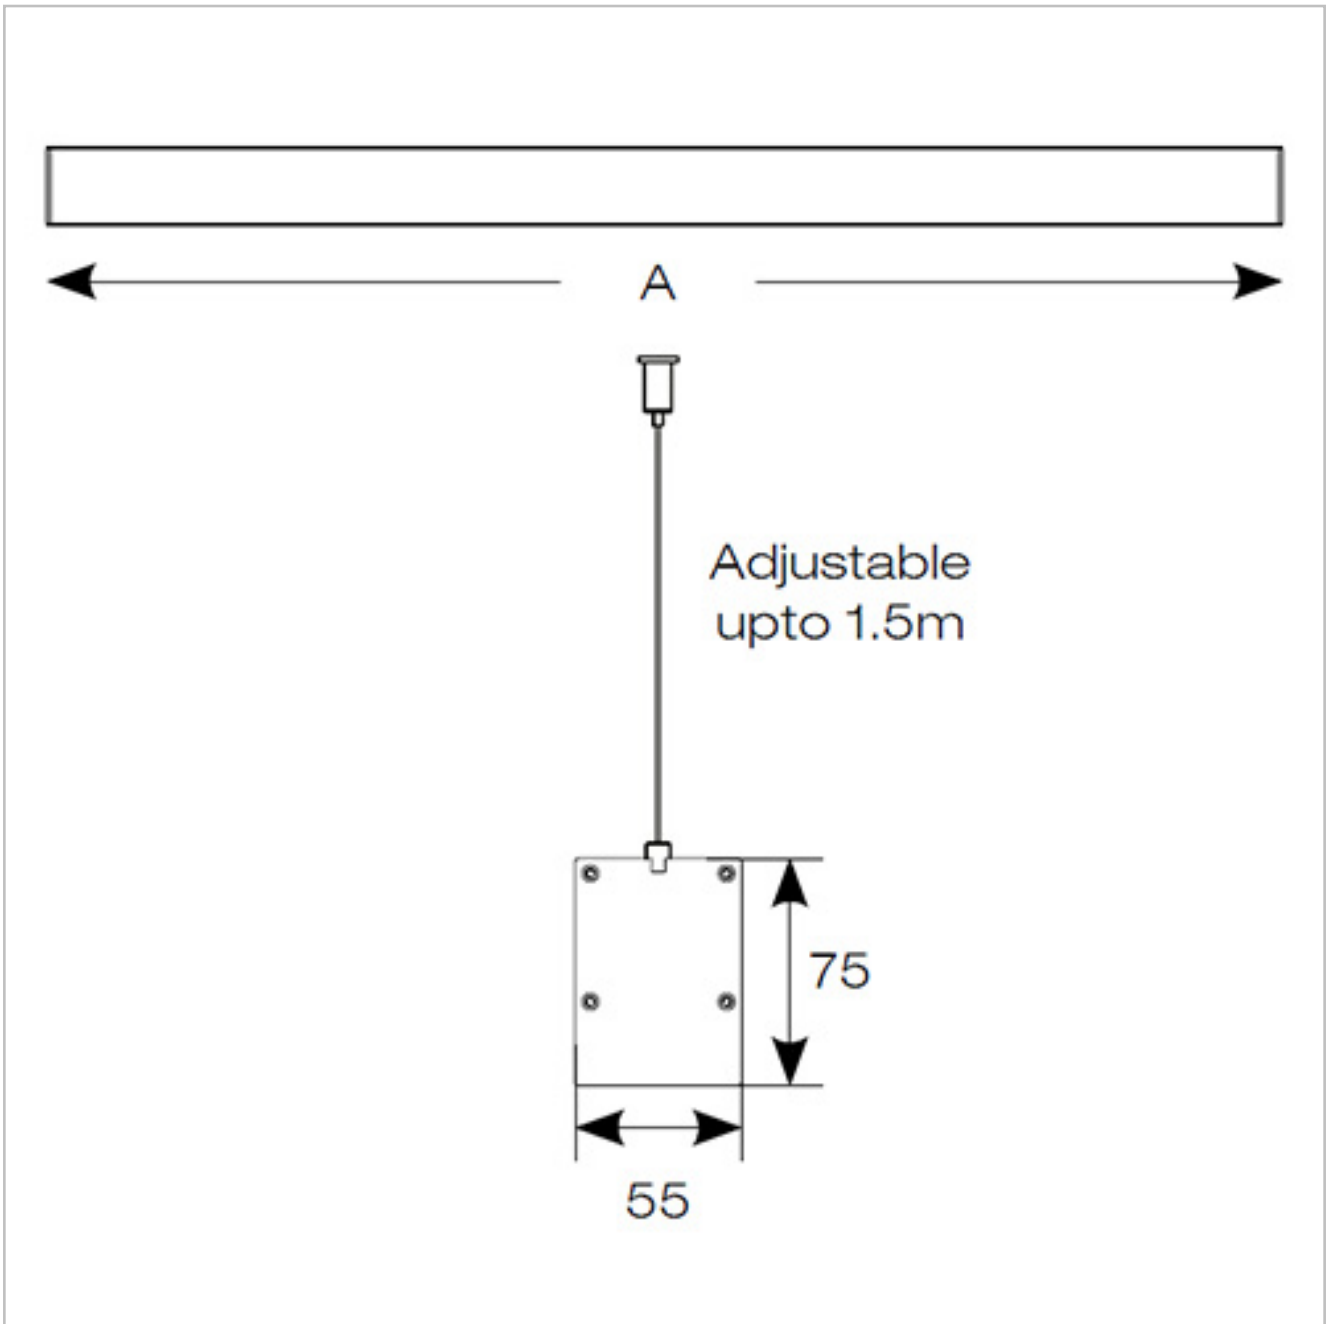



AVASLED5/LO

Vasco LED CCT Suspended Linear 20W Warm White/Cool White/Daylight - Aluminium

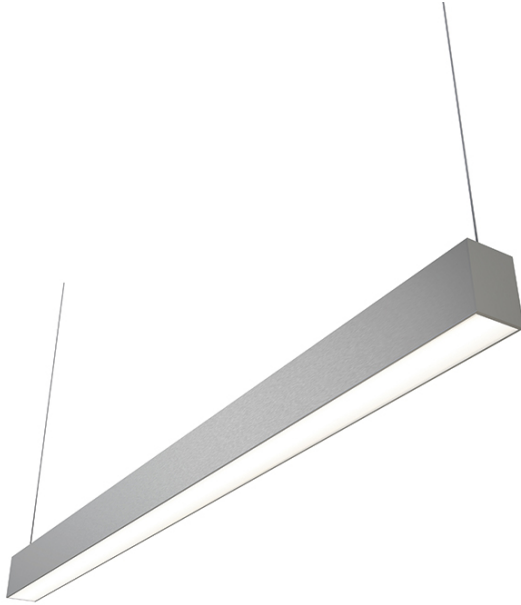

Features

Aluminium bi-directional suspended pendant suitable for education, commercial and retail applications

Aluminium extruded construction with integral driver

Supplied bi-directional light output as standard with 30% upward light and 70% downward light ratio (directional only option can be selected if required)

Opal diffuser provides optimal light uniformity

Selectable CCT between 3000K,4000K and 6000K output

Pre-wired with 1.5 metre cable

Adjustable suspension points c/w suspension kit

1-10V dimmable as standard

General Information

Lamp Type	LED
Colour / Finish	Aluminium
IP Rating	IP20
Class Protection	1
Internal / External	Internal
Surface / Recessed / Suspended	Suspended
Lifetime (Hrs)	L90 36,000
Warranty (Years)	3
CE Mark	Yes
Length (mm)	1504
Width (mm)	55
Height (mm)	75
Accessories	AVASLED/LC, AVASLED/90, AVASLED/90/B

Technical Information

Wattage	20W
Lumens Delivered	2000lm (4000K)
Lm/W	103lm (4000K)
Beam Angle	105
CRI	Ra 80
CCT	3000K/4000K/6000K
Input	220-240V
Hertz	50/60Hz
Operating Temp	-20°C to 45°C
SDCM	6
UGR	20

Datasheet generated from <https://onetimepim.com> last updated Tuesday, July 5, 2022 2:23:24 PM



