

Check Out the stock and Full Range ONLINE
integral-LED.com

BULKHEAD - TOUGH SHELL+

- IK10 & IP66 - Tough & weatherproof casing
- Microwave Sensor and Emergency options available
- Side and rear cable entries



Product Code	Description
TOUGH SHELL+ BULKHEAD	
ILBHA041	350MM DIA IP66 2500LM 24W 4000K IK10 120 BEAM NON-DIMM BLACK 104LM/W
ILBHA042	EMERGENCY 3HR 350MM DIA IP66 2400LM 24W 4000K IK10 120 BEAM NON-DIMM BLACK 100LM/W
ILBHA043	MICROWAVE SENSOR 350MM DIA IP66 2500LM 24W 4000K IK10 120 BEAM NON-DIMM BLACK 104LM/W
ILBHA051	MICROWAVE SENSOR 308MM DIA IP66 1500LM 15W 4000K IK10 110 BEAM NON-DIMM BLACK 100LM/W
ILBHA057	EMERGENCY 3HR 308MM DIA IP66 1400LM 15W 4000K IK10 110 BEAM NON-DIMM WHITE 93LM/W
ILBHA060	308MM DIA IP66 1500LM 15W 4000K IK10 110 BEAM NON-DIMM BLACK 100LM/W
ILBHA061	EMERGENCY 3HR 308MM DIA IP66 1400LM 15W 4000K IK10 110 BEAM NON-DIMM BLACK 93LM/W
ILBHA062	MICROWAVE SENSOR 308MM DIA IP66 1500LM 15W 4000K IK10 110 BEAM NON-DIMM BLACK 100LM/W
ILBHA063	EMERGENCY 3HR AND MICROWAVE SENSOR 308MM DIA IP66 1400LM 15W 4000K IK10 110 BEAM NON-DIMM BLACK 93LM/W

BATTEN - VALUE+




- Great balance of price and performance
- Highly efficient - 120 lm/W
- 2ft (667 x 54 x 37mm), 4ft (1187 x 54 x 37mm), 5ft (1487 x 54 x 37mm)
- Great retrofit batten: surface mount brackets and then clip into place. Pre-wire at rear to complete simple installation
- Cable Entry on rear at one end
- Includes cable 0.5M

Product Code	Description
VALUE+ BATTEN	
ILBTE059	VALUE+ BATTEN 1350LM 12W 3000K 120 BEAM 120LM/W 600MM 2FT NON-DIMM INTEGRAL
ILBTE060	VALUE+ BATTEN 2850LM 25W 3000K 120 BEAM 120LM/W 1200MM 4FT NON-DIMM INTEGRAL
ILBTE061	VALUE+ BATTEN 4050LM 36W 3000K 120 BEAM 120LM/W 1500MM 5FT NON-DIMM INTEGRAL
ILBTE063	VALUE+ BATTEN 3000LM 25W 4000K 120 BEAM 120LM/W 1200MM 4FT NON-DIMM INTEGRAL
ILBTE064	VALUE+ BATTEN 4320LM 36W 4000K 120 BEAM 120LM/W 1500MM 5FT NON-DIMM INTEGRAL

BATTEN - LIGHTSPAN SLIM

LIGHTSPAN
SLIM

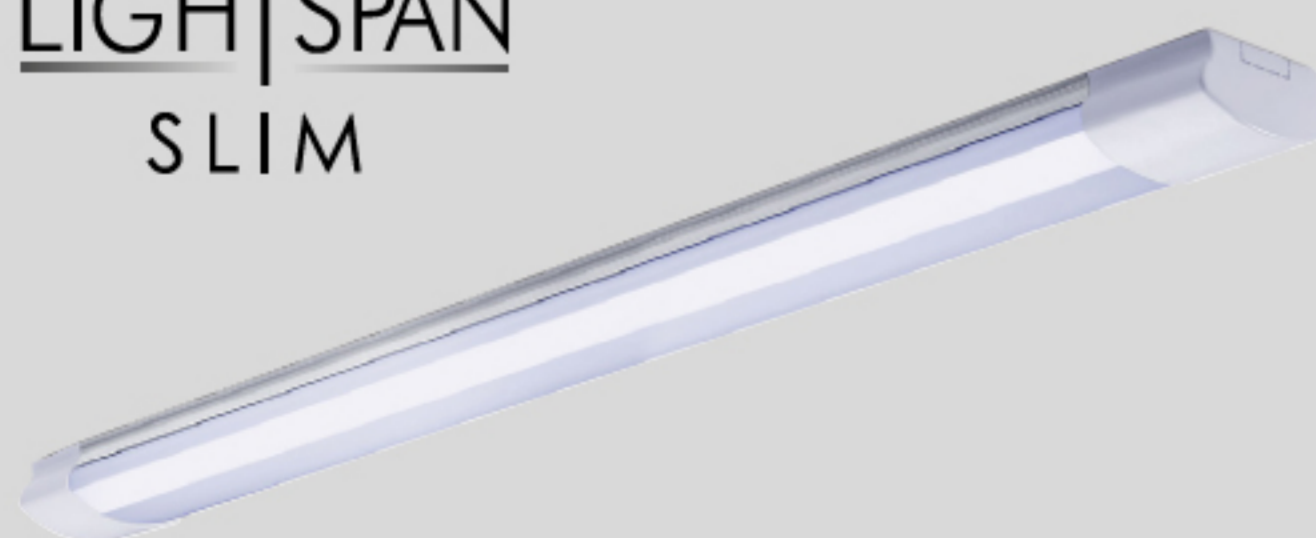

- Modern replacement for "Pop Pack" replace twin battens
- Stylish, brushed aluminium casing, only 72mm thick
- Highly efficient - 120 lm/W
- 2ft (600 x 72 x 38mm), 4ft (1200 x 72 x 38mm), 5ft (1500 x 72 x 38mm), 6ft (1800 x 72 x 38mm)
- Surface mount brackets and then clip into place
- Pre-wired with rear entry
- Cable Entry on end (and knockout)
- Includes cable 0.5M

LIMITED STOCK

Product Code	Description
LIGHTSPAN SLIM BATTEN	
ILBTF076	MOTION SENSOR 4800LM 40W 4000K 120 BEAM 120LM/W 1200MM 4FT NON-DIMM INTEGRAL