

JC5420

Coral LED

Coral LED CRI90 Mains IP20 Recessed Downlight 24W 4000K



Features & Benefits

- 2x26W CFL direct replacement
- Structural heat sink removes the need for noisy and inefficient cooling fans
- CRI 90 ideal for retail applications



WARRANTY



RATING

General Information

Mounting	Recessed
Environment	Indoor
Suitable For Zones	Outside of zone 2
Product Group	LED - Recessed
Product Range	Commercial
Trade Name	Coral LED
Product Shape	Round
Product Weight(kg)	1.3
Light Source	LED
Light Source Features	Neutral White
Additional Information	See luminaire accessories for rim finishes available(IP65 rim optional)
Luminaire Accessories	JC5052N / JC5054 / JC5060 / JC5068 / JC5110 / JC5118
Recommended Product Location	Ceiling application indoors only
Minimum Void Requirement	150mm
Method Of Fix	Use the ceiling clips provided
Product Aperture Size	212mm
IP Rating	IP20
Origin of manufacturer	China
Warranty	2 years standard warranty extends to 5 years when registered within the first year of purchase (See Website for terms and conditions)
Driver Manufacturer	LIFUD

LED Manufacturer/Type	SLE G5 17MM 3000LM 900MA/TRIDONIC
Lighting Product Type 1	Downlight
Electrical	
Voltage Rating	100-240
Operating Frequency Hz	50/60Hz
Secondary running current(mA)	600
Constant Current or Constant Voltage	CC
Luminaire Circuit Wattage	24
Class	I
Output Voltage Max/Range (VDC)	30-40
EMC Compliant (EN55015)	yes
Power Factor Correction	0.9
Input Electrical Connections	Live , Earth, Neutral 300mm Pre-wired Cable c/w GST-18 Plug
Dimmable	no

Thermals

Max Driver/Ballast Ambient Temp.	26°C
Thermal Cut Out	yes
Insulation Coverage	Do not cover
Minimum Free Air Space	100mm
Minimum Void Requirement	150mm
Operating Temperature Range °C	-25 to +26

Performance Data

LED Life (Hours)	30000
------------------	--------------

Hours life stated is an indication of expected L70 chip and light output calculations when operating in optimum conditions. Product warranty period supports the full product during the term given. The L70 hours expectancy is not correlated with the full product warranty term, nor is it a representation of lumen depreciation during the warranty period.

Energy Rating	This product contains a light source of energy efficiency class F
Actual Lumen Output	2200
Lumens Per Circuit Watt	92
Color Rendering Index	90-100
CRi: Ra	90
Correlated Color Temperature	4000K
Beam Angle °	110
LOR (Light Output Ratio) %	100
Photometry Available	yes

Construction



Primary Material	Aluminium
Heat Sink	Aluminium
Driver Housing	Polycarbonate

Packaging

Product Packaged Weight(kg)	1.6
Quantity Per Outer Carton	4
Product Bar Code EAN-13 Number	5052544051418

Standards & Approvals

Manufactured In Accordance To	BS EN 60598-2-2
CE Marked	yes
UKCA Marked	Yes
Date code/Purchase order No.	Yes
WEEE Symbol	yes
Certificate Of Conformity	Available on request
Accredited Members	LIA, ISO9001-2015, ISO14001-2015

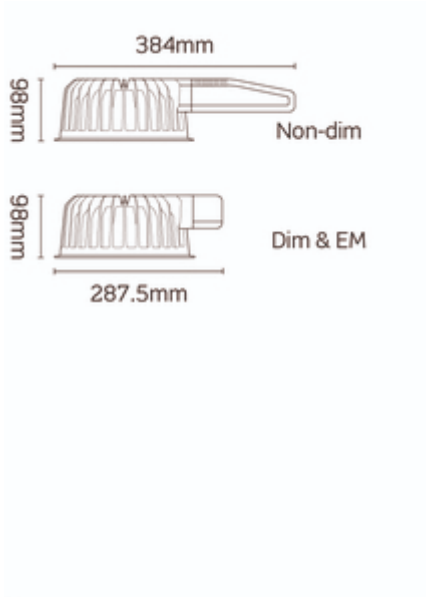

JCC Lighting LTD Innovation Centre, Beeding Close, Southern Cross Trading Estate, Bognor Regis, West Sussex PO22 9TS
Sales: 01243 838999 (8am to 5pm Monday to Friday) Fax: 01243 838998 | sales@jcc.co.uk | www.jcc.co.uk
Company Registration Number: 03044848 | VAT Number: 918544112