

# Technical Specification

**Product Code:** DPAB30535BK

**Description:** 13A Ingot 1 Gang Zigbee Smart Switched Socket Outlet



### General Information

<b>Plate Dimensions (mm)</b>	88 (W) x 88 (H) x 8 (D)	
<b>Dimensions With Gasket (mm)</b>	91 (W) x 91 (H) x 9 (D)	
<b>Plate Fixing Centres - Horizontal (mm)</b>	60.3	
<b>Style</b>	Rounded Profile	
<b>Finish</b>	Antique Brass	
<b>Insert Colour</b>	Black	
<b>Gasket Colour</b>	Black	
<b>Materials</b>	Front Plate: Stainless Steel Rear Housing: Nylon Terminal Screws: Steel & Yellow Passivated Electronics: PCB & Electronic Components	Insert: Urea Terminals: Brass Internal Busbars: Formed Pressed Brass
<b>Rated Voltage (V~) (Ue)</b>	240	<b>Frequency (Hz)</b> 50
<b>Resistive Load Rating (A)</b>	13	
<b>Termination Type</b>	Screw	
<b>Terminal Size (mm)</b>	5.7 x 4.8	<b>Terminal Torque Value (Nm)</b> 1.2
<b>Terminal Capacity - Solid (mm²)</b>	3 x 2.5 or 2 x 4	
<b>Single Pole Switched</b>	Yes	
<b>3 Pin Safety Shuttered</b>	Yes	
<b>Twin Earth Terminals</b>	No	
<b>Protocol</b>	Zigbee	<b>Signal Transmission Frequency</b> 2.4GHz
<b>Open Air Wireless Range (M)</b>	<160	
<b>Standby Current (mA)</b>	1	
<b>Indicator Colour</b>	White & Orange	
<b>Minimum Back Box Depth (mm)</b>	25	
<b>Ingress Protection</b>	IP20	
<b>Operational Temperature (°C)</b>	-5 to +40	
<b>Warranty (Years)</b>	3	

**Additional Information** For cleaning / polishing of products, use only a soft, dry, clean cloth.  
3 pin safety shutter. The shutter will only open once all three plug pins are inserted.  
Zigbee signal mesh  
Enables manual control (unless locked), wireless control and automated control  
Voice control via ClickSmart+ Hub using Alexa and/or Google Home


**Components Supplied** Smart Socket Outlet Fixing Screws Instruction Manual

**Programming Information** With hub and app setup and socket wired and powered, press the switches for five to ten seconds, the orange LED indicator starts flashing. Can be paired with hub via app.

# Technical Specification

**Product Code:** DPAB30536BK

**Description:** 13A Ingot 2 Gang Zigbee Smart Switched Socket Outlet

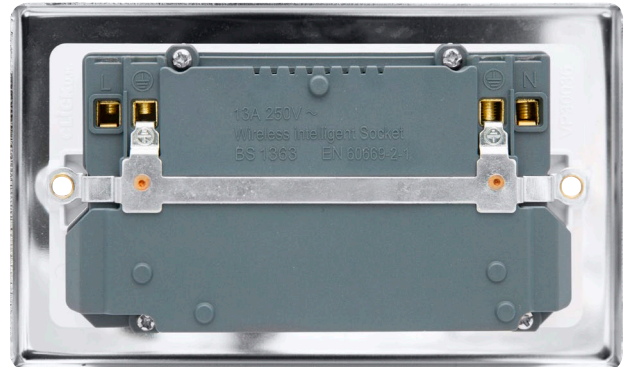

### General Information

<b>Plate Dimensions (mm)</b>	146 (W) x 88 (H) x 8 (D)	
<b>Dimensions With Gasket (mm)</b>	149 (W) x 91 (H) x 9 (D)	
<b>Plate Fixing Centres - Horizontal (mm)</b>	120.6	
<b>Style</b>	Rounded Profile	
<b>Finish</b>	Antique Brass	
<b>Insert Colour</b>	Black	
<b>Gasket Colour</b>	Black	
<b>Materials</b>	Front Plate: Stainless Steel Rear Housing: Nylon Terminal Screws: Steel & Yellow Passivated Electronics: PCB & Electronic Components	Insert: Urea Terminals: Brass Internal Busbars: Formed Pressed Brass
<b>Rated Voltage (V~) (Ue)</b>	240	<b>Frequency (Hz)</b> 50
<b>Resistive Load Rating (A)</b>	13	
<b>Termination Type</b>	Screw	
<b>Terminal Size (mm)</b>	5.7 x 4.8	<b>Terminal Torque Value (Nm)</b> 1.2
<b>Terminal Capacity - Solid (mm²)</b>	3 x 2.5 or 2 x 4	
<b>Single Pole Switched</b>	Yes	
<b>3 Pin Safety Shuttered</b>	Yes	
<b>Twin Earth Terminals</b>	Yes	
<b>Protocol</b>	Zigbee	<b>Signal Transmission Frequency</b> 2.4GHz
<b>Open Air Wireless Range (M)</b>	<160	
<b>Standby Current (mA)</b>	1	
<b>Indicator Colour</b>	White & Orange	
<b>Minimum Back Box Depth (mm)</b>	25	
<b>Ingress Protection</b>	IP20	
<b>Operational Temperature (°C)</b>	-5 to +40	
<b>Warranty (Years)</b>	3	

**Additional Information** For cleaning / polishing of products, use only a soft, dry, clean cloth.  
3 pin safety shutter. The shutter will only open once all three plug pins are inserted.  
Zigbee signal mesh  
Enables manual control (unless locked), wireless control and automated control  
Voice control via ClickSmart+ Hub using Alexa and/or Google Home

**Components Supplied** Smart Socket Outlet Fixing Screws Instruction Manual

**Programming Information** With hub and app setup and socket wired and powered, press one of the switches for five to ten seconds, the orange LED indicator starts flashing. Can be paired with hub via app.