



01604 495 151
collingwoodlighting.com

- collingwoodled
- /collingwoodlighting
- collingwoodlighting

Salvus Surface

High Performance Emergency Spot

Features

IK rating	IK04
IP rating	IP20
LED Lifetime	50,000h L70
CRI	80 Ra

Installation information

Install Connector Type	Integrated terminals, loop-in/loop-out
Construction Material	Polycarbonate
Maximum Ambient Temperature	0 to +45
Electric Class (1, 2, 3)	2

Guarantee

4 years on electronics, 2 years on battery

Features & benefits

- High efficacy of 140lm/W
- Quick and easy installation with loop-in/loop-out connector
- Low energy consumption of 2W

Photometrics @ 25°C

Product code	Finish	Feature I	Feature II	W	Colour	Beam	lm/W	EM
EMWSQEM	White RAL9003	White	Manual Test	2W	6500K	165° / 160°x50°	140	280lm Open 230lm Corridor
EMSWRDEM	White RAL9003	White	Manual Test	2W	6500K	165° / 160°x50°	140	280lm Open 230lm Corridor
EMSBSQEM	Black RAL9005	Black	Manual Test	2W	6500K	165° / 160°x50°	140	280lm Open 230lm Corridor
EMSBRDEM	Black RAL9005	Black	Manual Test	2W	6500K	165° / 160°x50°	140	280lm Open 230lm Corridor


Accessories

Office	Remote emergency lighting for mains lighting range	Sold Separately
Education	Remote emergency lighting for mains lighting range	Sold Separately
Retail	Remote emergency lighting for mains lighting range	Sold Separately
Hotel & Leisure	Remote emergency lighting for mains lighting range	Sold Separately

Light source energy efficiency:



Beam angle:

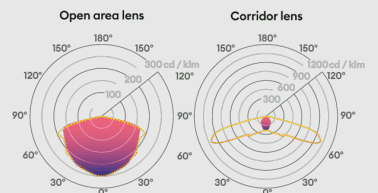


155mm



155mm

155mm



155mm

46mm