






01604 495 151  
collingwoodlighting.com

-  collingwoodled
-  /collingwoodlighting
-  collingwoodlighting

# Springbok Lite 11,000lm

80W High bay luminaire (Replaces 150W or 2x80W T5)

## Features

IK rating	IK08
IP rating	IP65
Colour flexibility	Fixed
Dimmable	No
Input	220-240V 50/60Hz Surge protection 6KV
LED Lifetime	54,000h L70
CRI	>80Ra
SDCM	5SDCM
Flicker Free	Yes
Emergency version available	Yes

## Installation information

Install Connector Type	Flying lead
Construction Material	ADC12 aluminium alloy tempered glass
Weight	1.60
Maximum ambient temperature	-20 to +40
Building regulations	Part P
Electric Class (1, 2, 3)	1

## Guarantee

4 years, 2 years on battery, 2 years on-site

## Features & benefits

Economical high bay for fast return on investment

Easy to add microwave sensor kit includes junction box and counter weight

On/off control with time delay and daylight switching (8-15 metres max)

Suitable for jack chain, M10 drop rod or catenary wire suspension

Pre-wired with 1.5M of H05RN-F cable for ease and speed of installation

Replaceable driver for easy maintenance

IK08 for robust impact protection

## Photometrics @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	lx @ 1m	EM
HBLIN	Matt black RAL9017	80W	4000K	110°	11000	138	3968	530
HBLINEM	Matt black RAL9017	80W	4000K	110°	11000	138	3968	530


## Wiring information

Cable / Flying Lead	1.5m H05RN-F 3x1.0mm <sup>2</sup> Ø7mm
Type of Wiring Required	Parallel


## Accessories

HBLMWS	High Bay Sbok Lite, Microwave sensor kit inc junction box and counterweight	Sold Separately
HBREM	High Bay Sbok Lite, Remote control for commissioning HBLMWS	Sold Separately
HBL1REFR	High Bay Sbok Lite, 80W 80-degree refractor	Sold Separately

## Beam angle: 110°

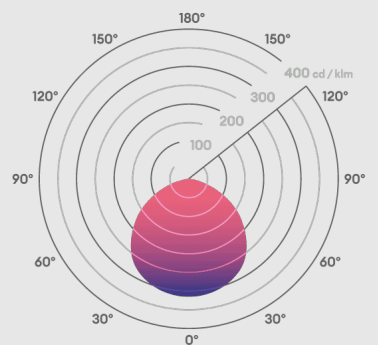




Ø210mm





01604 495 151  
collingwoodlighting.com

-  collingwoodled
-  /collingwoodlighting
-  collingwoodlighting

# Springbok Lite 21,000lm

150W High bay luminaire (Replaces 250W or 4X49W T5)

## Features

<b>IK rating</b>	IK08
<b>IP rating</b>	IP65
<b>Colour flexibility</b>	Fixed
<b>Dimmable</b>	No
<b>Input</b>	220-240V 50/60Hz Surge protection 6KV
<b>LED Lifetime</b>	54,000h L70
<b>CRI</b>	>80Ra
<b>SDCM</b>	5SDCM
<b>Flicker Free</b>	Yes
<b>Emergency version available</b>	Yes

## Installation information

<b>Install Connector Type</b>	Flying lead
<b>Construction Material</b>	ADC12 aluminium alloy tempered glass
<b>Weight</b>	1.86
<b>Maximum ambient temperature</b>	-20 to +40
<b>Building regulations</b>	Part P
<b>Electric Class (1, 2, 3)</b>	1

## Guarantee

4 years, 2 years on battery, 2 years on-site

## Features & benefits

- Economical high bay for fast return on investment
- Easy to add microwave sensor kit includes junction box and counter weight
- On/off control with time delay and daylight switching (8-15 metres max)
- Suitable for jack chain, M10 drop rod or catenary wire suspension
- Pre-wired with 1.5M of H05RN-F cable for ease and speed of installation
- Replaceable driver for easy maintenance
- IK08 for robust impact protection

## Photometrics @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	lx @ 1m	EM
HBL2N	Matt black RAL9017	150W	4000K	110°	21000	140	7531	530
HBL2NEM	Matt black RAL9017	150W	4000K	110°	21000	140	7531	530


## Wiring information

<b>Cable / Flying Lead</b>	1.5m H05RN-F 3x1.0mm <sup>2</sup> Ø7mm
<b>Type of Wiring Required</b>	Parallel

## Accessories

<b>HBLMWS</b>	High Bay Sbok Lite, Microwave sensor kit inc junction box and counterweight	Sold Separately
<b>HBREM</b>	High Bay Sbok Lite, Remote control for commissioning HBLMWS	Sold Separately
<b>HBL2REFR</b>	High Bay Sbok Lite, 150W 80-degree refractor	Sold Separately

Ø245mm





# Springbok Lite 27,000lm

200W High bay luminaire (Replaces 400W or 4x80W T5)

## Features

<b>IK rating</b>	IK08
<b>IP rating</b>	IP65
<b>Colour flexibility</b>	Fixed
<b>Dimmable</b>	No
<b>Input</b>	220-240V 50/60Hz Surge protection 6KV
<b>LED Lifetime</b>	54,000h L70
<b>CRI</b>	>80Ra
<b>SDCM</b>	5SDCM
<b>Flicker Free</b>	Yes
<b>Emergency version available</b>	Yes

## Installation information

<b>Install Connector Type</b>	Flying lead
<b>Construction Material</b>	ADC12 aluminium alloy tempered glass
<b>Weight</b>	2.20
<b>Maximum ambient temperature</b>	-20 to +40
<b>Building regulations</b>	Part P
<b>Electric Class (1, 2, 3)</b>	1

## Photometrics @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	lx @ 1m	EM
HBL3N	Matt black RAL9017	200W	4000K	110°	27000	135	9664	530
HBL3NEM	Matt black RAL9017	200W	4000K	110°	27000	135	9664	530

## Wiring information

<b>Cable / Flying Lead</b>	1.5m H05RN-F 3x1.0mm <sup>2</sup> Ø7mm
<b>Type of Wiring Required</b>	Parallel

## Accessories

<b>HBLMWS</b>	High Bay Sbok Lite, Microwave sensor kit inc junction box and counterweight	Sold Separately
<b>HBREM</b>	High Bay Sbok Lite, Remote control for commissioning HBLMWS	Sold Separately
<b>HBL3REFR</b>	High Bay Sbok Lite, 200W 80-degree refractor	Sold Separately



collingwood

01604 495 151  
collingwoodlighting.com

collingwoodled

/collingwoodlighting

collingwoodlighting

## Guarantee

4 years, 2 years on battery, 2 years on-site

## Features & benefits

Economical high bay for fast return on investment

Easy to add microwave sensor kit includes junction box and counter weight

On/off control with time delay and daylight switching (8-15 metres max)


Suitable for jack chain, M10 drop rod or catenary wire suspension

Pre-wired with 1.5M of H05RN-F cable for ease and speed of installation

Replaceable driver for easy maintenance

IK08 for robust impact protection

## Beam angle: 110°

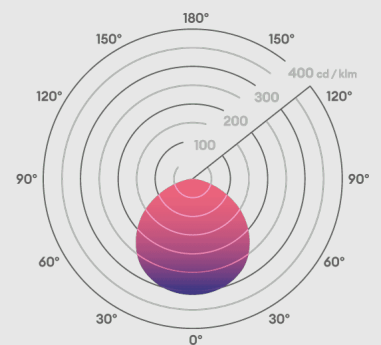

Ø280mm

