

**CANDLE BULB E14 806LM 7.5W 2700K NON-DIMM 280 BEAM FROSTED INTEGRAL**

ILCANDE14NC054



This bright LED Candle lamp emits a Warm light at high lumens for such a small bulb. This lamp is ideal for desk lamps over work benches in a home office or studio where bright light is important.

**Details**

<b>Quick Order Code:</b>	532674
<b>Barcode:</b>	5055788233305
<b>Category:</b>	Lamps
<b>Range Name:</b>	High Lumen
<b>Product Type:</b>	Candle
<b>Market Segment:</b>	Commercial indoor, Residential indoor
<b>Warranty (Years):</b>	2
<b>CE RoHS:</b>	Yes

**Physical Data**

<b>Product Length (mm):</b>	105
<b>Product Width (mm):</b>	35
<b>Material:</b>	Aluminium, Polycarbonate
<b>Base Term:</b>	Small Edison screw
<b>Bulb Base:</b>	E14
<b>Construction:</b>	Plastic heat-sink, Plastic diffuser
<b>Globe Type:</b>	Candle
<b>Bulb Fixing:</b>	Pendant, Wall, lamp stand, table lamp
<b>Bulb or Luminaire Shape:</b>	Oval
<b>Placement / Application:</b>	Indoor, General Lighting

**Electrical Data**

<b>Power (W):</b>	7.2
<b>Power Consumption (w):</b>	7.2
<b>Power Factor:</b>	0.5
<b>Wattage equivalent (W):</b>	60
<b>Amperage (mA):</b>	65
<b>Dimming:</b>	Non-Dimmable
<b>Driver Included:</b>	Yes


Electric Current:	AC
True Wattage Eq (W):	60
EN:	EN-62560
LVD Certified:	Yes

## Light Data

Luminous Flux in Lumens (lm):	806
Luminous efficacy (lm/W):	112
Correlated Colour Temperature (CCT) (K):	2700
Colour Temperature:	2700K - Warm
Colour Temperature Name:	Warm
Beam Angle:	260
Colour Rendering Index (CRI):	80
Instant on (Less than 1 second):	Yes
Lifetime (hours):	15000
Switching Cycles:	7500

## Environment

EN:	EN-62560
LVD Certified:	Yes
CE RoHS:	Yes
Energy Rating:	A+
Hg 0% (Mercury Free):	Yes
IP Rating (Ingress Protection):	IP20
Lowest Operating Temperature (°C):	-20
Maximum Operating Temperature (°C):	40

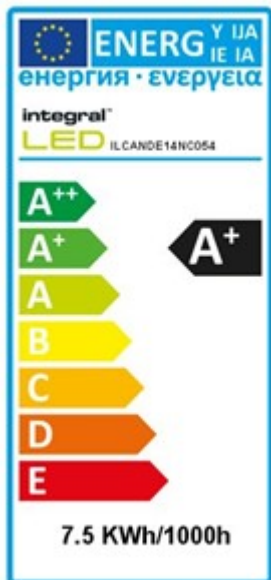

## Packaging

Package Weight (g):	54
Package Length (mm):	50
Package Width (mm):	50
Package Depth (mm):	110
Qty per euro pallet:	2200

[Portal.integral-led.com](http://Portal.integral-led.com)

[Portal.integral-led.com](http://Portal.integral-led.com)

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

**CANDLE BULB E14 830LM 7.5W 5000K NON-DIMM 280 BEAM FROSTED INTEGRAL**

ILCANDE14NF055



This bright LED Candle lamp emits a Daylight colour light at high lumens for such a small bulb. This lamp is ideal for desk lamps over work benches in a home office or studio where bright light and cool colour temperatures are important.

**Details**

<b>Quick Order Code:</b>	532701
<b>Barcode:</b>	5055788233336
<b>Category:</b>	Lamps
<b>Range Name:</b>	High Lumen
<b>Product Type:</b>	Candle
<b>Market Segment:</b>	Commercial indoor, Residential indoor
<b>Warranty (Years):</b>	2
<b>CE RoHS:</b>	Yes

**Physical Data**

<b>Product Length (mm):</b>	105
<b>Product Width (mm):</b>	35
<b>Material:</b>	Aluminium, Polycarbonate
<b>Base Term:</b>	Small Edison screw
<b>Bulb Base:</b>	E14
<b>Construction:</b>	Plastic heat-sink, Plastic diffuser
<b>Globe Type:</b>	Candle
<b>Bulb Fixing:</b>	Pendant, Wall, lamp stand, table lamp
<b>Bulb or Luminaire Shape:</b>	Oval
<b>Placement / Application:</b>	Indoor, General Lighting

**Electrical Data**

<b>Power (W):</b>	7.2
<b>Power Consumption (w):</b>	7.2
<b>Power Factor:</b>	0.5
<b>Wattage equivalent (W):</b>	60
<b>Amperage (mA):</b>	65
<b>Dimming:</b>	Non-Dimmable


<b>Driver Included:</b>	Yes
<b>Electric Current:</b>	AC
<b>True Wattage Eq (W):</b>	60
<b>EN:</b>	EN-62560
<b>LVD Certified:</b>	Yes

## Light Data

<b>Luminous Flux in Lumens (lm):</b>	806
<b>Luminous efficacy (lm/W):</b>	112
<b>Correlated Colour Temperature (CCT) (K):</b>	5000
<b>Colour Temperature:</b>	5000K - Daylight
<b>Colour Temperature Name:</b>	Daylight
<b>Beam Angle:</b>	260
<b>Colour Rendering Index (CRI):</b>	80
<b>Instant on (Less than 1 second):</b>	Yes
<b>Lifetime (hours):</b>	15000
<b>Switching Cycles:</b>	7500

## Environment

<b>EN:</b>	EN-62560
<b>LVD Certified:</b>	Yes
<b>CE RoHS:</b>	Yes
<b>Energy Rating:</b>	A+
<b>Hg 0% (Mercury Free):</b>	Yes
<b>IP Rating (Ingress Protection):</b>	IP20
<b>Lowest Operating Temperature (°C):</b>	-20
<b>Maximum Operating Temperature (°C):</b>	40

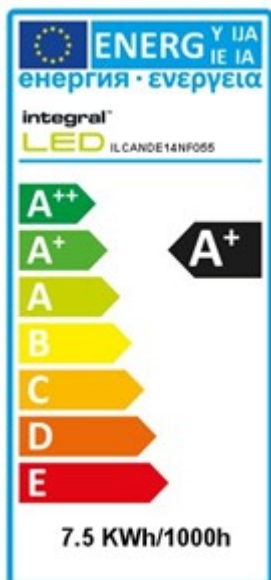

## Packaging

<b>Package Weight (g):</b>	54
<b>Package Length (mm):</b>	50
<b>Package Width (mm):</b>	50
<b>Package Depth (mm):</b>	110
<b>Qty per euro pallet:</b>	2200

[Portal.integral-led.com](http://Portal.integral-led.com)

[Portal.integral-led.com](http://Portal.integral-led.com)

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE