

**PRECISION PRO FLOODLIGHT IP65 60000LM 400W 4000K 60X135 BEAM
150LM/W INTEGRAL**

ILFLD064



Shine powerful light exactly where you need it with the Precision Pro Industrial Floodlight. These super-tough, super-efficient floodlights utilise up to sixteen banks of LEDs, with skilfully engineered lenses that individually focus each LED, allowing some models to project asymmetrical beam angles that evenly illuminate a specific area. This makes them ideal for professional applications such as smaller scale sporting venues, car parks and walkways around retail or industrial estates.

Details

Quick Order Code:	128235
Barcode:	5055788245896
Category:	Luminaires
Range Name:	Precision Pro
Product Type:	Industrial Floodlights
Product Body Finish:	Matt Black
Market Segment:	Commercial & Industrial Outdoor
Finish:	Matt Black
Warranty (Years):	5
CE RoHS:	Yes

Physical Data

Product Length (mm):	654
Product Depth (mm):	148
Product Width (mm):	460
Product Weight (g):	19450
Optic:	Polycarbonate diffuser
Material:	Polycarbonate
Construction:	Aluminium, Iron and 304 Stainless Steel
Bulb or Luminaire Shape:	Rectangle
Luminaire Fixing:	Bracket for Wall & Pole Mounting
Mounting Type:	Pre Wired 1M flex
Placement / Application:	Outdoor, General Lighting

Electrical Data

Power Consumption (w):	400
-------------------------------	-----


Power Factor:	0.9
Input Voltage (V):	220-240
Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-60598
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	60000
Luminous efficacy (lm/W):	150
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature Name:	Cool White
Beam Angle:	60x135
Colour Rendering Index (CRI):	73
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	50000
Switching Cycles:	25000
Useful Lumens (lm):	60000

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK08
IP Rating (Ingress Protection):	IP65
Lowest Operating Temperature (°C):	-30
Maximum Operating Temperature (°C):	45

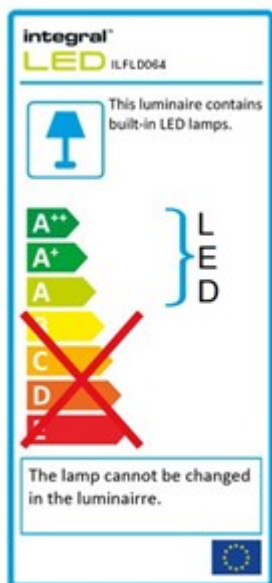

Packaging

Package Weight (g):	21500
----------------------------	-------

Portal.integral-led.com

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Length (mm):	690
Package Width (mm):	600
Package Depth (mm):	223

**PRECISION PRO FLOODLIGHT IP65 75000LM 500W 4000K 70 x 140 BEAM
150LM/W INTEGRAL**

ILFLD074



Shine powerful light exactly where you need it with the Precision Pro Industrial Floodlight. These super-tough, super-efficient floodlights utilise up to sixteen banks of LEDs, with skilfully engineered lenses that individually focus each LED, allowing some models to project asymmetrical beam angles that evenly illuminate a specific area. This makes them ideal for professional applications such as smaller scale sporting venues, car parks and walkways around retail or industrial estates.

Details

Quick Order Code:	602564
Barcode:	5055788245957
Category:	Luminaires
Range Name:	Precision Pro
Product Type:	Industrial Floodlights
Product Body Finish:	Matt Black
Market Segment:	Commercial & Industrial Outdoor
Finish:	Matt Black
Warranty (Years):	5
CE RoHS:	Yes

Physical Data

Product Length (mm):	654
Product Depth (mm):	148
Product Width (mm):	460
Product Weight (g):	20190
Optic:	Polycarbonate diffuser
Material:	Polycarbonate
Construction:	Aluminium, Iron and 304 Stainless Steel
Bulb or Luminaire Shape:	Rectangle
Luminaire Fixing:	Bracket for Wall & Pole Mounting
Mounting Type:	Pre Wired 1M flex
Placement / Application:	Outdoor, General Lighting

Electrical Data

Power Consumption (w):	500
-------------------------------	-----


Power Factor:	0.9
Input Voltage (V):	220-240
Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-60598
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	75000
Luminous efficacy (lm/W):	150
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature Name:	Cool White
Beam Angle:	60x135
Colour Rendering Index (CRI):	73
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	50000
Switching Cycles:	25000
Useful Lumens (lm):	75000

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK08
IP Rating (Ingress Protection):	IP65
Lowest Operating Temperature (°C):	-30
Maximum Operating Temperature (°C):	45

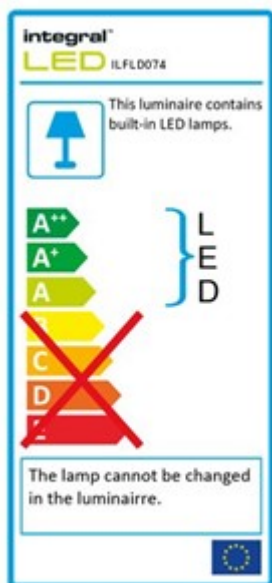

Packaging

Package Weight (g):	22500
----------------------------	-------

Portal.integral-led.com

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Length (mm):	690
Package Width (mm):	600
Package Depth (mm):	223

**PRECISION PRO FLOODLIGHT IP65 90000LM 600W 4000K 70X140 BEAM
150LM/W INTEGRAL**

ILFLD084



Shine powerful light exactly where you need it with the Precision Pro Industrial Floodlight. These super-tough, super-efficient floodlights utilise up to sixteen banks of LEDs, with skilfully engineered lenses that individually focus each LED, allowing some models to project asymmetrical beam angles that evenly illuminate a specific area. This makes them ideal for professional applications such as smaller scale sporting venues, car parks and walkways around retail or industrial estates.

Details

Quick Order Code:	204818
Barcode:	5055788246015
Category:	Luminaires
Range Name:	Precision Pro
Product Type:	Industrial Floodlights
Product Body Finish:	Matt Black
Market Segment:	Commercial & Industrial Outdoor
Finish:	Matt Black
Warranty (Years):	5
CE RoHS:	Yes

Physical Data

Product Length (mm):	763
Product Depth (mm):	148
Product Width (mm):	460
Product Weight (g):	23150
Optic:	Polycarbonate diffuser
Material:	Polycarbonate
Construction:	Aluminium, Iron and 304 Stainless Steel
Bulb or Luminaire Shape:	Rectangle
Luminaire Fixing:	Bracket for Wall & Pole Mounting
Mounting Type:	Pre Wired 1M flex
Placement / Application:	Outdoor, General Lighting

Electrical Data

Power Consumption (w):	600
-------------------------------	-----


Power Factor:	0.9
Input Voltage (V):	220-240
Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-60598
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	90000
Luminous efficacy (lm/W):	150
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature Name:	Cool White
Beam Angle:	60x135
Colour Rendering Index (CRI):	73
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	50000
Switching Cycles:	25000
Useful Lumens (lm):	90000

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK08
IP Rating (Ingress Protection):	IP65
Lowest Operating Temperature (°C):	-30
Maximum Operating Temperature (°C):	45

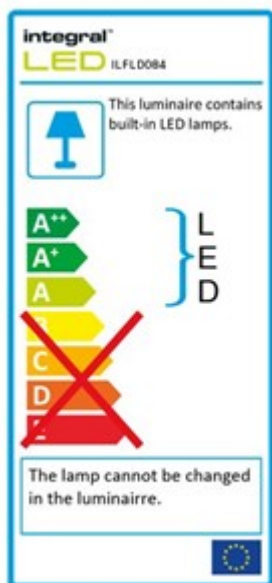

Packaging

Package Weight (g):	25700
----------------------------	-------

Portal.integral-led.com

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Length (mm):	770
Package Width (mm):	600
Package Depth (mm):	223

**PRECISION PRO FLOODLIGHT IP65 122500LM 800W 4000K 70X140 BEAM
150LM/W INTEGRAL**

ILFLD094



Shine powerful light exactly where you need it with the Precision Pro Industrial Floodlight. These super-tough, super-efficient floodlights utilise up to sixteen banks of LEDs, with skilfully engineered lenses that individually focus each LED, allowing some models to project asymmetrical beam angles that evenly illuminate a specific area. This makes them ideal for professional applications such as smaller scale sporting venues, car parks and walkways around retail or industrial estates.

Details

Quick Order Code:	792745
Barcode:	5055788246077
Category:	Luminaires
Range Name:	Precision Pro
Product Type:	Industrial Floodlights
Product Body Finish:	Matt Black
Market Segment:	Commercial & Industrial Outdoor
Finish:	Matt Black
Warranty (Years):	5
CE RoHS:	Yes

Physical Data

Product Length (mm):	819
Product Depth (mm):	131
Product Width (mm):	546
Product Weight (g):	30000
Optic:	Polycarbonate diffuser
Material:	Polycarbonate
Construction:	Aluminium, Iron and 304 Stainless Steel
Bulb or Luminaire Shape:	Rectangle
Luminaire Fixing:	Bracket for Wall & Pole Mounting
Mounting Type:	Pre Wired 1M flex
Placement / Application:	Outdoor, General Lighting

Electrical Data

Power Consumption (w):	800
-------------------------------	-----


Power Factor:	0.9
Input Voltage (V):	220-240
Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-60598
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	122500
Luminous efficacy (lm/W):	153
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature Name:	Cool White
Beam Angle:	70x140
Colour Rendering Index (CRI):	73
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	50000
Switching Cycles:	25000
Useful Lumens (lm):	122500

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK08
IP Rating (Ingress Protection):	IP65
Lowest Operating Temperature (°C):	-30
Maximum Operating Temperature (°C):	45

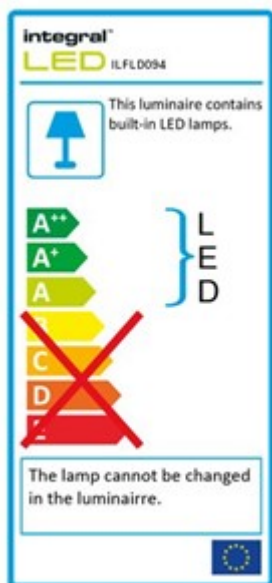

Packaging

Package Weight (g):	32000
----------------------------	-------

Portal.integral-led.com

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Length (mm):	900
Package Width (mm):	740
Package Depth (mm):	200

**PRECISION PRO FLOODLIGHT IP65 153000LM 1000W 4000K 70X140 BEAM
150LM/W INTEGRAL**

ILFLD104



Shine powerful light exactly where you need it with the Precision Pro Industrial Floodlight. These super-tough, super-efficient floodlights utilise up to sixteen banks of LEDs, with skilfully engineered lenses that individually focus each LED, allowing some models to project asymmetrical beam angles that evenly illuminate a specific area. This makes them ideal for professional applications such as smaller scale sporting venues, car parks and walkways around retail or industrial estates.

Details

Quick Order Code:	740196
Barcode:	5055788246138
Category:	Luminaires
Range Name:	Precision Pro
Product Type:	Industrial Floodlights
Product Body Finish:	Matt Black
Market Segment:	Commercial & Industrial Outdoor
Finish:	Matt Black
Warranty (Years):	5
CE RoHS:	Yes

Physical Data

Product Length (mm):	926
Product Depth (mm):	131
Product Width (mm):	546
Product Weight (g):	30000
Optic:	Polycarbonate diffuser
Material:	Polycarbonate
Construction:	Aluminium, Iron and 304 Stainless Steel
Bulb or Luminaire Shape:	Rectangle
Luminaire Fixing:	Bracket for Wall & Pole Mounting
Mounting Type:	Pre Wired 1M flex
Placement / Application:	Outdoor, General Lighting

Electrical Data

Power Consumption (w):	1000
-------------------------------	------


Power Factor:	0.9
Input Voltage (V):	220-240
Dimming:	Non-Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-60598
LVD Certified:	Yes

Light Data

Luminous Flux in Lumens (lm):	153000
Luminous efficacy (lm/W):	153
Correlated Colour Temperature (CCT) (K):	4000
Colour Temperature Name:	Cool White
Beam Angle:	70x140
Colour Rendering Index (CRI):	73
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	50000
Switching Cycles:	25000
Useful Lumens (lm):	153000

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK08
IP Rating (Ingress Protection):	IP65
Lowest Operating Temperature (°C):	-30
Maximum Operating Temperature (°C):	45

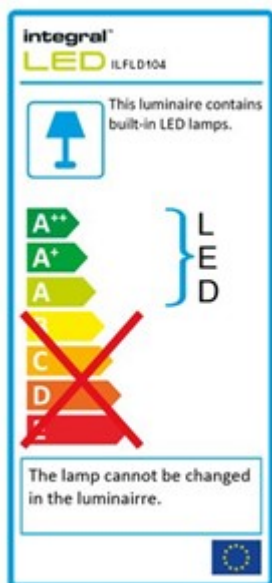

Packaging

Package Weight (g):	40000
----------------------------	-------

Portal.integral-led.com

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

Package Length (mm):	900
Package Width (mm):	800
Package Depth (mm):	200