

**PRECISION PRO RGB+W DMX512 FLOODLIGHT 80W 85X135 BEAM IP67
BLACK INTEGRAL**

ILFLRGBW005



Shine colourful light exactly where you need it with the Precision Pro Industrial Floodlight. These super-tough, super-efficient floodlights utilise up to six banks of RGB+W LEDs with DMX512 controlled (ILFLRGBWA002) colour patterns to create striking light effects on building facades and outdoor features. Hospitality venues and outdoor performance spaces will benefit from the explosion of vibrant colour that the Precision pro can provide.

Details

Quick Order Code:	626940
Barcode:	5055788242338
Category:	Luminaires
Range Name:	Precision Pro RGBW
Product Type:	Industrial Floodlights
Product Body Finish:	Matt Black
Market Segment:	Commercial & Industrial Outdoor
Finish:	Matt Black
Warranty (Years):	5
CE RoHS:	Yes

Physical Data

Product Length (mm):	325
Product Depth (mm):	91
Product Width (mm):	321
Product Weight (g):	6000
Optic:	Polycarbonate diffuser
Material:	Polycarbonate
Construction:	Aluminium, Iron and 304 Stainless Steel
Bulb or Luminaire Shape:	Rectangle
Luminaire Fixing:	Bracket for Wall & Pole Mounting,
Mounting Type:	Pre Wired 1M flex
Placement / Application:	Outdoor, General Lighting

Electrical Data

Power Consumption (w):	80
-------------------------------	----


Power Factor:	0.9
Input Voltage (V):	220-240
Dimming:	Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-60598
LVD Certified:	Yes

Light Data

Colour Temperature Name:	RGB+W
Beam Angle:	85x135
Colour Rendering Index (CRI):	80
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	50000
Switching Cycles:	25000

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK08
IP Rating (Ingress Protection):	IP65
Lowest Operating Temperature (°C):	-30
Maximum Operating Temperature (°C):	45

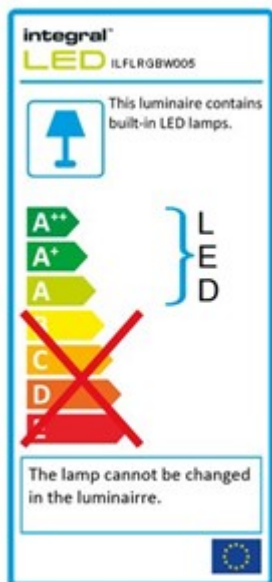

Packaging

Package Weight (g):	7500
Package Length (mm):	450
Package Width (mm):	390
Package Depth (mm):	170

Portal.integral-led.com

Portal.integral-led.com

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

**PRECISION PRO RGB+W DMX512 FLOODLIGHT 100W 85X135 BEAM IP67
BLACK INTEGRAL**

ILFLRGBW015



Shine colourful light exactly where you need it with the Precision Pro Industrial Floodlight. These super-tough, super-efficient floodlights utilise up to six banks of RGB+W LEDs with DMX512 controlled (ILFLRGBWA002) colour patterns to create striking light effects on building facades and outdoor features. Hospitality venues and outdoor performance spaces will benefit from the explosion of vibrant colour that the Precision pro can provide.

Details

Quick Order Code:	244978
Barcode:	5055788242390
Category:	Luminaires
Range Name:	Precision Pro RGBW
Product Type:	Industrial Floodlights
Product Body Finish:	Matt Black
Market Segment:	Commercial & Industrial Outdoor
Finish:	Matt Black
Warranty (Years):	5
CE RoHS:	Yes

Physical Data

Product Length (mm):	325
Product Depth (mm):	91
Product Width (mm):	321
Product Weight (g):	6000
Optic:	Polycarbonate diffuser
Material:	Polycarbonate
Construction:	Aluminium, Iron and 304 Stainless Steel
Bulb or Luminaire Shape:	Rectangle
Luminaire Fixing:	Bracket for Wall & Pole Mounting,
Mounting Type:	Pre Wired 1M flex
Placement / Application:	Outdoor, General Lighting

Electrical Data

Power Consumption (w):	100
-------------------------------	-----


Power Factor:	0.9
Input Voltage (V):	220-240
Dimming:	Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-60598
LVD Certified:	Yes

Light Data

Colour Temperature Name:	RGB+W
Beam Angle:	85x135
Colour Rendering Index (CRI):	80
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	50000
Switching Cycles:	25000

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK08
IP Rating (Ingress Protection):	IP65
Lowest Operating Temperature (°C):	-30
Maximum Operating Temperature (°C):	45

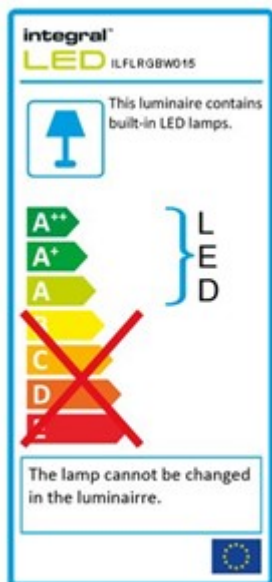

Packaging

Package Weight (g):	7500
Package Length (mm):	450
Package Width (mm):	390
Package Depth (mm):	170

Portal.integral-led.com

Portal.integral-led.com

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

**PRECISION PRO RGB+W DMX512 FLOODLIGHT 120W 85X135 BEAM IP67
BLACK INTEGRAL**

ILFLRGBW025



Shine colourful light exactly where you need it with the Precision Pro Industrial Floodlight. These super-tough, super-efficient floodlights utilise up to six banks of RGB+W LEDs with DMX512 controlled (ILFLRGBWA002) colour patterns to create striking light effects on building facades and outdoor features. Hospitality venues and outdoor performance spaces will benefit from the explosion of vibrant colour that the Precision pro can provide.

Details

Quick Order Code:	799957
Barcode:	5055788242451
Category:	Luminaires
Range Name:	Precision Pro RGBW
Product Type:	Industrial Floodlights
Product Body Finish:	Matt Black
Market Segment:	Commercial & Industrial Outdoor
Finish:	Matt Black
Warranty (Years):	5
CE RoHS:	Yes

Physical Data

Product Length (mm):	325
Product Depth (mm):	91
Product Width (mm):	418
Product Weight (g):	7400
Optic:	Polycarbonate diffuser
Material:	Polycarbonate
Construction:	Aluminium, Iron and 304 Stainless Steel
Bulb or Luminaire Shape:	Rectangle
Luminaire Fixing:	Bracket for Wall & Pole Mounting,
Mounting Type:	Pre Wired 1M flex
Placement / Application:	Outdoor, General Lighting

Electrical Data

Power Consumption (w):	120
-------------------------------	-----


Power Factor:	0.9
Input Voltage (V):	220-240
Dimming:	Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-60598
LVD Certified:	Yes

Light Data

Colour Temperature Name:	RGB+W
Beam Angle:	85x135
Colour Rendering Index (CRI):	80
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	50000
Switching Cycles:	25000

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK08
IP Rating (Ingress Protection):	IP65
Lowest Operating Temperature (°C):	-30
Maximum Operating Temperature (°C):	45

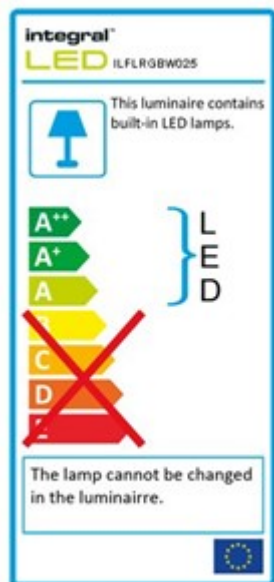

Packaging

Package Weight (g):	8200
Package Length (mm):	485
Package Width (mm):	450
Package Depth (mm):	170

Portal.integral-led.com

Portal.integral-led.com

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE

PRECISION PRO RGB+W DMX512 FLOODLIGHT 300W 85X135 BEAM IP67 BLACK INTEGRAL

ILFLRGBW035



Shine colourful light exactly where you need it with the Precision Pro Industrial Floodlight. These super-tough, super-efficient floodlights utilise up to six banks of RGB+W LEDs with DMX512 controlled (ILFLRGBWA002) colour patterns to create striking light effects on building facades and outdoor features. Hospitality venues and outdoor performance spaces will benefit from the explosion of vibrant colour that the Precision pro can provide.

Details

Quick Order Code:	900920
Barcode:	5055788242512
Category:	Luminaires
Range Name:	Precision Pro RGBW
Product Type:	Industrial Floodlights
Product Body Finish:	Matt Black
Market Segment:	Commercial & Industrial Outdoor
Finish:	Matt Black
Warranty (Years):	5
CE RoHS:	Yes

Physical Data

Product Length (mm):	460
Product Depth (mm):	148
Product Width (mm):	444
Product Weight (g):	12500
Optic:	Polycarbonate diffuser
Material:	Polycarbonate
Construction:	Aluminium, Iron and 304 Stainless Steel
Bulb or Luminaire Shape:	Rectangle
Luminaire Fixing:	Bracket for Wall & Pole Mounting,
Mounting Type:	Pre Wired 1M flex
Placement / Application:	Outdoor, General Lighting

Electrical Data

Power Consumption (w):	300
-------------------------------	-----


Power Factor:	0.9
Input Voltage (V):	220-240
Dimming:	Dimmable
Driver Included:	Yes
Electric Current:	AC
EN:	EN-60598
LVD Certified:	Yes

Light Data

Colour Temperature Name:	RGB+W
Beam Angle:	85x135
Colour Rendering Index (CRI):	80
Instant on (Less than 1 second):	Yes
LED Type:	Surface mounted device (SMD)
Lifetime (hours):	50000
Switching Cycles:	25000

Environment

EN:	EN-60598
LVD Certified:	Yes
CE RoHS:	Yes
EU Luminaire:	L
Hg 0% (Mercury Free):	Yes
IK Rating (Impact Protection):	IK08
IP Rating (Ingress Protection):	IP65
Lowest Operating Temperature (°C):	-30
Maximum Operating Temperature (°C):	45

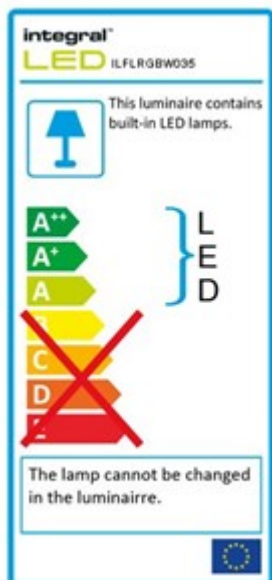

Packaging

Package Weight (g):	14000
Package Length (mm):	590
Package Width (mm):	480
Package Depth (mm):	223

Portal.integral-led.com

Portal.integral-led.com

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE