

# SPIKE LIGHTS SPECIFICATION SHEET



## SL040A

High output LED spike light

### FEATURES

IP rating	IP65
Colour flexibility	Fixed colour
Tilttable	90°
Input	700mA
LED Lifetime	70,000h L70 B10
CRI	>80Ra
SDCM	3SDCM

### INSTALLATION INFORMATION

Bathroom zone	1
Construction Material	Anodised aluminium
Weight	600g
Maximum ambient temperature	35°C
Electric Class (1, 2, 3)	3

### PHOTOMETRICS @ 25°C

Product code	Finish	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
SL040A F NW	Black Anodised Aluminium	7W	4000K	38°	520	74	1471
SL040A S NW	Black Anodised Aluminium	7W	4000K	18°	520	74	4614
SL040A F WW	Black Anodised Aluminium	7W	3000K	38°	413	59	1168
SL040A S WW	Black Anodised Aluminium	7W	3000K	18°	413	59	3665
SL040A F 27	Black Anodised Aluminium	7W	2700K	38°	377	54	1066
SL040A S 27	Black Anodised Aluminium	7W	2700K	18°	377	54	3345

### WIRING INFORMATION

Cable / Flying Lead	3m H05RN-F rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

### LED DRIVERS

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
PLU/700 3-9	220V-240V	Yes	No	1	1	3
PL/IP/700 1-3	220V-240V	Yes	No	1	1	1
PLD UNI-DRIVE 700MA	220V-240V	Yes	Yes (1-10V)	2	1	3


### ACCESSORIES


JB2 / JB4 / JB6	Waterproof junction box / Gel filled waterproof connectors
WCR 275 BLACK	2-core rubber cable
PDC/GRID DIMMER	1-10V dimmer module




COLLINGWOOD  
LIGHTING

01604 495 151  
collingwoodlighting.com

 /collingwoodlighting

 /collingwoodlighting

 collingwoodled

### GUARANTEE / WARRANTY

7 year extended warranty


### FEATURES & BENEFITS

Long spike included for extra stability

Robust cable for outdoor use

Hooded for reduced glare

### Beam angles: 18° 38°

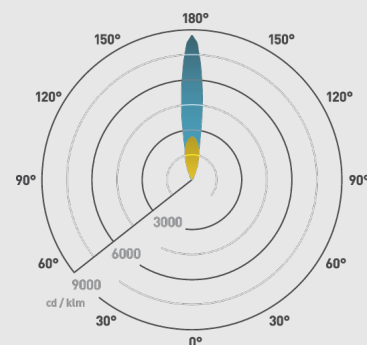

Ø57mm

