


# STRIP LIGHTS SPECIFICATION SHEET

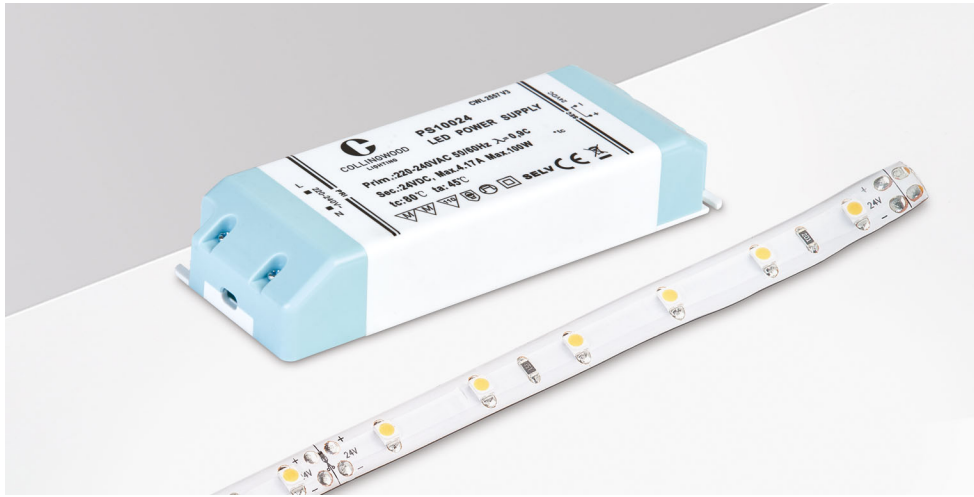

**COLLINGWOOD**  
LIGHTING

01604 495 151  
collingwoodlighting.com

/collingwoodlighting

/collingwoodlighting

collingwoodled

## SP154

IP44 LED strip pack and IP20 driver

### FEATURES

IP rating	IP44
Colour flexibility	Fixed colour
Self-Adhesive Backing	Yes
Input	220-240V 50/60Hz
LED Lifetime	30,000h
CRI	>80Ra
SDCM	5SDCM
Wattage	75W

### INSTALLATION INFORMATION

Bathroom zone	2
Construction Material	Flexible tape with PU coating
Weight	196g per meter
Maximum ambient temperature	40°C
SELV	Yes
Electric Class (1, 2, 3)	3

### GUARANTEE / WARRANTY

3 year extended warranty

### FEATURES & BENEFITS

IP44 14.4W/m LED strip pack

Ideal for outdoors, and humid areas in kitchens and bathrooms.

Excellent primary lighting and within coving

Cut points every 50mm

3M self-adhesive backing for secure and easy installation

Supplied in a resealable, antistatic bag to protect during transit

### PHOTOMETRICS @ 25°C

Product code	Feature I	Feature II	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
SP15440	5m reel	60 LEDs/m	72W per 5m 14.4W per m	4000K	100°	1200	83	411
SP15430	5m reel	60 LEDs/m	72W per 5m 14.4W per m	3000K	100°	1050	73	360
SP15427	5m reel	60 LEDs/m	72W per 5m 14.4W per m	2700K	100°	875	61	300

### WIRING INFORMATION

Cable / Flying Lead	Supplied with a minimum of 200mm flying lead from one end
Type of Wiring Required	Parallel


### LED DRIVER

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
PS7524	220V-240V	Yes	Yes (PDCINT1-10V)	N/A	-	5m


### ACCESSORIES

LED STRIP PROFILE RANGE	Profile range to house adhesive strip
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types
LED COVE PACK	Coving to house adhesive strip
PDCINT1-10V	1-10V dimming interface for use with 24V LED drivers

### Beam angle: 100°

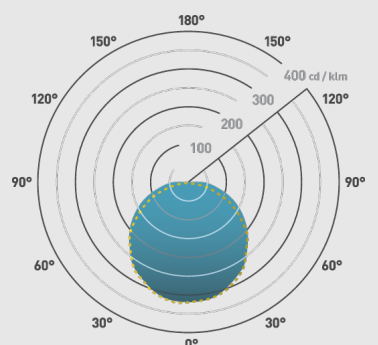

5m/50mm



14mm