

STRIP LIGHTS SPECIFICATION SHEET



RGBW Strip Kit

FEATURES

IP rating	IP20
Colour flexibility	RGBW
Self-Adhesive Backing	Yes
Dimmable	Yes
LED Lifetime	25,000h
Wattage	75W

INSTALLATION INFORMATION

Insulation Coverable	No
Inrush Current	75A 0.11ms
Efficiency	>85%
Construction Material	Copper
Maximum ambient temperature	40°C
SELV	Yes

PHOTOMETRICS @ 25°C

Product code	Feature l	Beam angle	lm	lm/W	lx @ 1m
SPRGBW	5m reel	120°	373	78	124
SPRGBW	5m reel	120°	110	25	33
SPRGBW	5m reel	120°	296	62	89
SPRGBW	5m reel	120°	79	18	24

LED DRIVER

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
PS7524	N/A	N/A	N/A	N/A	N/A	N/A




ACCESSORIES

LED STRIP PROFILE RANGE	Profile range to house adhesive strip
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types
LED COVE PACK	Coving to house adhesive strip
PDCINT1-10V	1-10V dimming interface for use with 24V LED drivers
LSBFC8 / LSBFCS8 / LSBFCD8	Range of fast fix connectors



COLLINGWOOD
LIGHTING

01604 495 151
collingwoodlighting.com

-  /collingwoodlighting
-  /collingwoodlighting
-  collingwoodled


GUARANTEE / WARRANTY

3 year extended warranty


FEATURES & BENEFITS

- 5m reel
- Driver included
- Remote control included
- IP20 making it ideal for indoor use
- 14.4W/m

Beam angle:

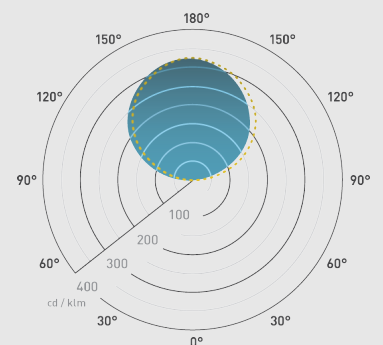

5m/100mm




12mm