

Uni-Fit™


High power integrated LED downlights

make smart with



See pg.218-219 for compatibility table

- Featuring ThermoTec™ heat management technology
- Delivering up to 93lm/W
- Suitable for all new and retrofit installation requirements
- Pre-wired with 500mm 2 core cable
- IP44 rated
- Supplied with integrated LED driver

 For Dimming Compatibility see pages 224-225



Downlights

Cat. No.	Watts	Colour	Lumens	lm/W	Beam	Cutout [Ø]
Non-Dimmable						
EN-DL10/30	10W	3000K	850lm	85	100°	90mm
EN-DL10/40	10W	4000K	900lm	90	100°	90mm
EN-DL15/30	15W	3000K	1250lm	83	100°	120mm
EN-DL15/40	15W	4000K	1350lm	90	100°	120mm
EN-DL23/30	23W	3000K	2000lm	87	100°	170mm
EN-DL23/40	23W	4000K	2100lm	91	100°	170mm
EN-DL30/30	30W	3000K	2600lm	87	100°	200mm
EN-DL30/40	30W	4000K	2800lm	93	100°	200mm
Triac Dimmable						
EN-DDL10/40	10W	4000K	820lm	82	100°	90mm
EN-DDL15/40	15W	4000K	1200lm	80	100°	120mm
EN-DDL20/40	20W	4000K	1800lm	90	100°	170mm
EN-DDL25/40	25W	4000K	2000lm	80	100°	200mm

Emergency Pack


AU-DLEMB2 3 Hour Maintained Emergency Pack





- 3 Year Warranty
- L70 25,000hrs
- Triac dimmable option
- Emergency option
- White finish



works with
.control

-  Triac In-Line Dimmer
See pg.31
-  Smart Rotary Dimmer
See pg.25
-  On/Off Relay
See pg.37

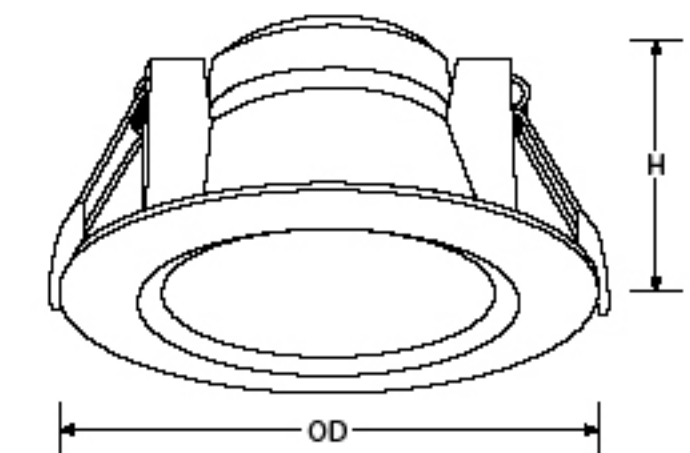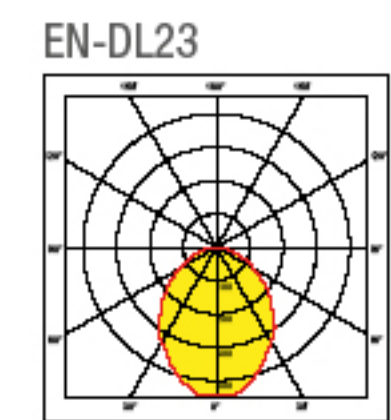

EN-DDL10 (H) 60mm Height (OD) 120mm Overall (Ø)	EN-DL10 (H) 60mm Height (OD) 120mm Overall (Ø)
EN-DDL15 (H) 60mm Height (OD) 150mm Overall (Ø)	EN-DL15 (H) 60mm Height (OD) 150mm Overall (Ø)
EN-DDL20 (H) 65mm Height (OD) 200mm Overall (Ø)	EN-DL23 (H) 65mm Height (OD) 200mm Overall (Ø)
EN-DDL25 (H) 65mm Height (OD) 235mm Overall (Ø)	EN-DL30 (H) 65mm Height (OD) 235mm Overall (Ø)