



WALL LIGHTS SPECIFICATION SHEET




**COLLINGWOOD
LIGHTING**

01604 495 151
collingwoodlighting.com

 /collingwoodlighting

 /collingwoodlighting

 collingwoodled

WL015

IP65, 1,000lm up-down wall light

FEATURES

IK rating	IK04
IP rating	IP65
Colour flexibility	Fixed colour
Input	220-240V 50/60Hz
LED Lifetime	30,000h L70 B10
CRI	>80Ra
SDCM	<4

INSTALLATION INFORMATION

Inrush Current	20A 0.5ms
Construction Material	Powder coated aluminium
Weight	800g
Maximum ambient temperature	40°C
Electric Class (1, 2, 3)	1

PHOTOMETRICS @ 25°C

Product code	Finish	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
WL015X30	Black RAL9011	13.0W	3000K	88°	1000	77	362
WL015G30	Grey RAL7022	13.0W	3000K	88°	1000	77	362

ACCESSORIES

No accessories required

GUARANTEE / WARRANTY

5 year extended warranty available

FEATURES & BENEFITS

Ideal for framing doorways and entrances

Straight to mains screw terminals

Durable powder coated aluminium in contemporary black or grey finish


Up & down light for creating a feature of perimeters and entrances

High resistance to weather conditions

Up to 1000lm, makes this an ideal choice for columns and tall surfaces

Integral bracket for easy installation

Beam angle: 88°

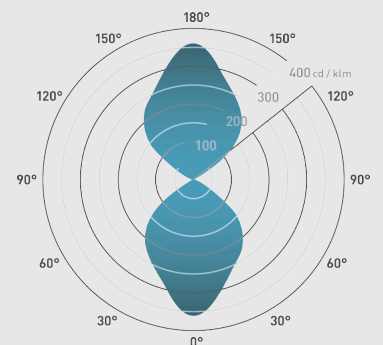

100mm 65mm

