

WALL LIGHTS SPECIFICATION SHEET



**COLLINGWOOD
LIGHTING**

01604 495 151
collingwoodlighting.com

/collingwoodlighting

/collingwoodlighting

collingwoodled

WL220 MAINS

Straight to mains LED wall light

FEATURES

IP rating	IP65
Colour flexibility	Fixed colour
Tilttable	90°
Rotation angle	330°
Dimmable	No
Input	220-240V 50/60Hz
LED Lifetime	70,000h L70 B10
CRI	>80Ra
SDCM	3SDCM

INSTALLATION INFORMATION

Bathroom zone	2
Inrush Current	60A 0.037ms
Construction Material	Anodised aluminium Stainless Steel 316 Copper
Weight	0.5kg
Maximum ambient temperature	50°C
Electric Class (1, 2, 3)	1

GUARANTEE / WARRANTY

7 year extended warranty

FEATURES & BENEFITS

Straight to mains

High efficacy - up to 93lm/W

Improved look and feel with single LED

New stainless steel and anodised bronze finishes

Higher light output than predecessor

PHOTOMETRICS @ 25°C

Product code	Finish	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
WL220ZWBM40	Bronze	5.7W	4000K	40°	530	93	1205
WL220BWBM40	Black	5.7W	4000K	40°	530	93	1205
WL220DWBM40	Silver	5.7W	4000K	40°	530	93	1205
WL220ZWBM30	Bronze	5.7W	3000K	40°	520	91	1182
WL220BWBM30	Black	5.7W	3000K	40°	520	91	1182
WL220DWBM30	Silver	5.7W	3000K	40°	520	91	1182
WL220ZWBM27	Bronze	5.7W	2700K	40°	515	90	1171
WL220BWBM27	Bronze	5.7W	2700K	40°	515	90	1171
WL220DWBM27	Silver	5.7W	2700K	40°	515	90	1171
WL220CWBM27	Copper	5.7W	2700K	40°	515	90	1171

WIRING INFORMATION

Cable / Flying Lead	0.3m
Type of Wiring Required	Parallel


LED DRIVER

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
N/A (integrated SELV driver)	220-240V	Yes	No	N/A	N/A	N/A

ACCESSORIES

GH220
GS220

Beam angle: 40°

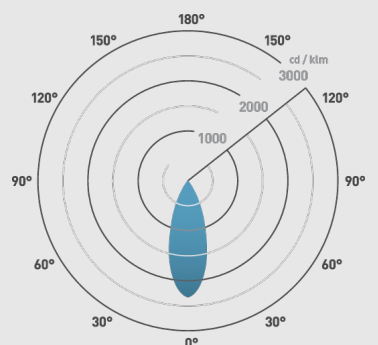

145mm

