

15 Watt, ZB15 Series, DC-DC Converter (Single & Dual Output)

- Wide 2:1 & Extra Wide 4:1 Input Ranges
- Remote on/off Control
- 1600V Input to Output Isolation
- Compact 2x1" Encapsulated Metal Case
- PCB Mounting, Option of Chassis & Screw Terminals.
- Very Competitive Prices
- High Efficiency up to 87%
- Wide Operational Temperature Range
- CE Marked and UL Listed



Specification (typical values shown)

Input Ranges.....	(2:1) 9~18, 18~36, & 36~75 Volts (4:1) 9~36 & 18~75 Volts
Outputs.....	Single or dual outputs available (see table below)
Line Regulation.....	+/-0.5%
Load Regulation.....	+/-1%
Output Ripple.....	<0.2% of Vout
Output Noise.....	<0.5% of Vout
Efficiency.....	See table for each model
Short Circuit Protection.....	Current limit, auto-recovery
Isolation Voltage.....	1600 VDC
Operating Temperature.....	-25 to +70 °C – see derating curve
Storage Temperature.....	-55 to +105 °C
Case Material.....	5 sided shielded Aluminium, non conductive base
Switching Frequency.....	300 kHz typical
MTBF.....	>800,000 hrs @ 25°C (MIL-HDBK-217F)
Warranty.....	3 Years

Models and Ratings

Model (9~18V Input)	Model (18~36V Input)	Model (36~75V Input)	Output (VDC)	Output Current	Efficiency
Single Output Models					
ZB15-12-3.3S	ZB15-24-3.3S	ZB15-48-3.3S	3.3 V	3000 mA	77% to 79%
ZB15-12-5S	ZB15-24-5S	ZB15-48-5S	5.0 V	3000 mA	80% to 83%
ZB15-12-12S	ZB15-24-12S	ZB15-48-12S	12 V	1250 mA	82% to 86%
ZB15-12-15S	ZB15-24-15S	ZB15-48-15S	15 V	1000 mA	84% to 87%
ZB15-12-24S	ZB15-24-24S	ZB15-48-24S	24 V	625 mA	84% to 87%
Dual Output Models					
ZB15-12-5D	ZB15-24-5D	ZB15-48-5D	+/-5 V	+/-1500 mA	78%
ZB15-12-12D	ZB15-24-12D	ZB15-48-12D	+/-12 V	+/-625 mA	79%
ZB15-12-15D	ZB15-24-15D	ZB15-48-15D	+/-15 V	+/-500 mA	79%
4:1 Input Versions					
Model (9~36V Input)	Model (18~75V Input)	Output (VDC)	Output Current	Efficiency	
ZB15-24F-3.3S	ZB15-48F-3.3S	3.3 V	3000 mA	70% to 71%	
ZB15-24F-5S	ZB15-48F-5S	5.0 V	3000 mA	76% to 78%	
ZB15-24F-12S	ZB15-48F-12S	12 V	1250 mA	77% to 79%	
ZB15-24F-15S	ZB15-48F-15S	15 V	1000 mA	75% to 79%	

Note : Efficiency of units are within the ranges above, each model depends on Input and Output Voltage

For mechanical data and pinout, please see next page


Expert Electrical Supplies Ltd
 Unit 3C Buckley Rd Ind Est
 Buckley Rochdale
 Lancs, OL12 9EF

15 Watt, ZB15 Series, DC-DC Converter (Single & Dual Output)

Mechanical Details and Pin-Out



Top View

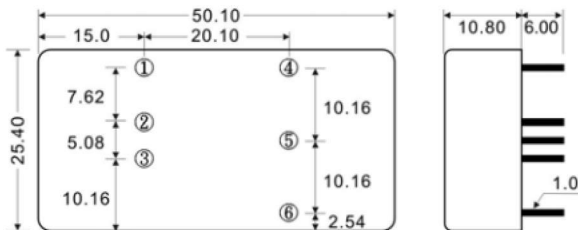

Pin	Function	
	Single O/P	Dual O/P
1	On/Off R/C	On/Off R/C
2	-V in	-V in
3	+V in	+V in
4	-V out	-V out
5	No Pin	Common
6	+V out	+V out
Pin 1 = Remote On/Off Control		

Standard units are supplied with **Remote On/Off** control pin,
 This pin need not be used for normal operation or can be removed (cropped off) if preferred.
 Leave pin 1 (CTRL) open / not connected for Output ON
 Short pin 1 (CTRL) to pin 2 -V in for Output OFF
 Or positive Logic control (with respect to pin 2 -Vin)
 4 to 6 Volts on pin 1 = Output On
 0 to 0.1 Volt on pin 1 = Output Off

Chassis mounting version with screw terminal connections.

Total size 96 x 53.9 x 18.3mm
 Please contact ALL PSU sales office for more details.

Derating Curve

