

5 Year Warranty

L70 50,000hrs

Emergency option

Microwave sensing option

White finish




works with

.control



On/Off Relay  
See pg.37



EN-BA1839



EN-BA1873

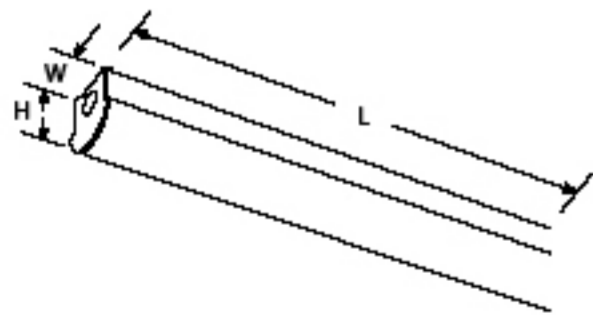

EN-BA1222

(L) 1170mm Length  
(W) 61mm Width  
(H) 71mm Height

EN-BA1243

(L) 1170mm Length  
(W) 61mm Width  
(H) 71mm Height

EN-BA1533

(L) 1470mm Length  
(W) 61mm Width  
(H) 71mm Height

EN-BA1563

(L) 1470mm Length  
(W) 61mm Width  
(H) 71mm Height

EN-BA1839

(L) 1734mm Length  
(W) 61mm Width  
(H) 71mm Height

EN-BA1873

(L) 1734mm Length  
(W) 61mm Width  
(H) 71mm Height

# BatPac<sup>TM</sup>PRO

High performance LED battens

make smart with



See pg.218-219 for compatibility table

Designed to directly replace single or twin lamp fluorescent fittings in size and output

Over 40% energy savings compared to traditional fluorescent

Delivering up to 121lm/W

Opal polycarbonate diffuser

Hard wearing painted steel chassis

IK08 rated impact resistance

Knockouts for cable entry on both ends

Push-fit terminals and clip-in gear tray for fast installation

Multiple BESA mounting points (matches traditional fluorescent)

Adjustable light detector from 2-50 lux for microwave option

Adjustable hold time 5 seconds to 30 minutes for microwave option

Can be surface mounted or suspended



Linears



Single



Twin



Cat. No. Type Watts Colour Lumens lm/W T8 Subst. Length (ft)

### Single

EN-BA1222\*/40 Non-Dim 22W 4000K 2600lm 118 1 x 36W 4

EN-BA1533\*/40 Non-Dim 33W 4000K 4000lm 121 1 x 58W 5

EN-BA1839\*/40 Non-Dim 39W 4000K 4700lm 121 1 x 72W 6

### Twin

EN-BA1243\*/40 Non-Dim 43W 4000K 5200lm 121 2 x 36W 4

EN-BA1563\*/40 Non-Dim 63W 4000K 7500lm 119 2 x 58W 5

EN-BA1873\*/40 Non-Dim 73W 4000K 8800lm 121 2 x 72W 6

\*Add suffix **EM** or **MS** for **Emergency** or **Microwave Sensor** options.

For **EMMS** (Emergency Microwave Sensor) options please contact sales.

