

## INTEGRATED LED DOWNLIGHT IP65 FIRE & ACOUSTIC RATED WITH FLEXI-DRIVER

### Features

- Integrated LED driver
- Flow<sup>®</sup> connector
- High Efficiency
- Flexi-driver mount
- Intumescent Collar
- IP65
- Various finishes
- 35° beam angle
- Adaptable cut-out
- Double Insulated
- Low-Energy
- Thermal protection
- Fire, Air-Flow and Acoustic Rated

### Benefits

- Straight to mains
- One quick, easy connection
- Part-L compliance
- Easy install into shallow ceiling void
- Added Fire-Protection
- Suitable for bathrooms/wet-rooms
- To suit any installation
- Wide spread of light
- Fits 61-71mm cut-out
- No Earth required
- Cost saving against traditional lamps
- Self-resetting if product overheats
- Building Regulations Compliant



#### Inceptor IP65 Downlight, Fire & Acoustic Rated Pre-Wired with Driver and Flow Connector

LED4400WH7W	7W Integrated LED - Warm White	White Bezel
LED4400CH7W	7W Integrated LED - Warm White	Chrome Bezel
LED4400SC7W	7W Integrated LED - Warm White	Satin Chrome Bezel
LED4400WH7C	7W Integrated LED - Cool White	White Bezel
LED4400CH7C	7W Integrated LED - Cool White	Chrome Bezel
LED4400SC7C	7W Integrated LED - Cool White	Satin Chrome Bezel

#### Inceptor IP65 Downlight, Fire & Acoustic Rated Pre-Wired with Dimmable Driver and Flow Connector\*

LED4400WH8WD	8W Integrated Dimmable LED - Warm White	White Bezel
LED4400CH8WD	8W Integrated Dimmable LED - Warm White	Chrome Bezel
LED4400SC8WD	8W Integrated Dimmable LED - Warm White	Satin Chrome Bezel
LED4400WH8CD	8W Integrated Dimmable LED - Cool White	White Bezel
LED4400CH8CD	8W Integrated Dimmable LED - Cool White	Chrome Bezel
LED4400SC8CD	8W Integrated Dimmable LED - Cool White	Satin Chrome Bezel

\* Available January 2013. Dimmable version suitable for use with selected dimmers only. Please see our website or contact the technical department on 01827 63454.

United Kingdom

**Scolmore**  
GROUP

Scolmore Park, Landsberg,  
Lichfield Road Industrial Estate,  
Tamworth, Staffordshire  
B79 7XB United Kingdom

T: +44 (0)1827 63454  
F: +44 (0)1827 63362  
E: sales@scolmore.com

[www.scolmore.com](http://www.scolmore.com)

Southern Ireland

**click** Litehouse

Unit 56/61, Newtown Business  
& Enterprise Centre,  
NewtownMountKennedy,  
Co.Wicklow, Ireland

T: +353 (1) 2811 122  
F: +353 (1) 2811 224  
E: sales@clicklighthouse.ie

[www.clicklighthouse.ie](http://www.clicklighthouse.ie)

*inceptor*




**OVIA**<sup>®</sup>  
OVIA LIGHTING BY CLICK

**INTEGRATED LED DOWNLIGHT**  
IP65 FIRE & ACOUSTIC RATED WITH FLEXI-DRIVER



The Inceptor range of downlights are covered by a 10 year warranty.\* Only valid once registered online by the end user at [www.scolmore.com/inceptor](http://www.scolmore.com/inceptor).

\*Only available for domestic use. A 5 year commercial warranty is also available at the above address.

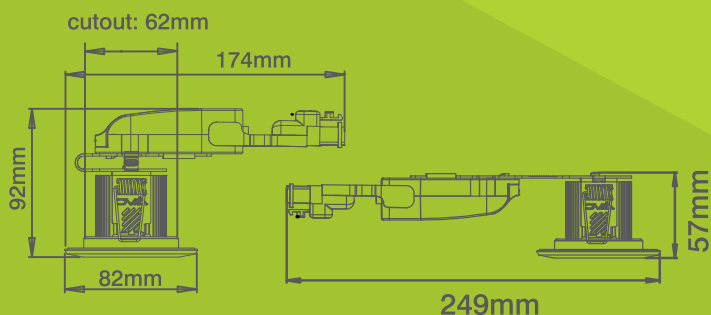

### General Information

Dimmable/Non-Dimmable	Non-Dimmable		Dimmable (Available Jan 2013)*	
	LED Colour Temperatures available	3000K (Warm)	4000K (Cool)	3000K (Warm)
Finish Colours Available	White, Chrome & Satin Chrome			
Material composition	Steel, Aluminium, ABS, Nylon & Polycarbonate			
Cut-Out	61-71mm			
Ceiling Thickness	5-40mm			
Ceiling Void depth	60mm+			
Dimensions	Height (closed) 95mm (open) 56mm, diameter 83mm, length 125mm (closed)			
Warranty	Registered: <b>10 Years</b> Domestic – <b>5 Years</b> Commercial. Unregistered 1 Year			
Weight	0.32Kg		0.33Kg	

### Light Output Information

Beam Angle	35°	35°
CRI	80	80
LED Lifetime (L70)	84,000hours	84,000hours
Luminous Flux	400lm (lumens)	400lm (lumens)
Output Wattage	7.2W	8W
Luminous Efficacy	55lm/W	45lm/W
Power Factor	0.85	0.85

### Driver Information

Connection	Integrated Flow® Connector	
Input	200-240V / 7.2W max (non-dimmable) 8W max (dimmable)*	
Output	650mA / 9.3 DC max	
Critical Temperature	70°C	
Thermal protection	Self-Resetting thermal cut-out	
Part L1 Compliancy (as of 2012)	Yes	Yes
Part L2 Compliancy (as of 2012)	Yes	No

### Regulation Ratings

Fire Rating	30, 60 & 90 minute
Ingress Protection	IP65 (Zone 1)
Acoustic Rating	0dB (zero impact on sound insulation)
Air Flow	BS 5250: 2002 compliant


### Other Information

Halogen content	Completely Halogen-free
-----------------	-------------------------

\* Available January 2013. Dimmable version suitable for use with selected dimmers only.

Please see our website or contact the technical department on 01827 63454.

*inceptor*

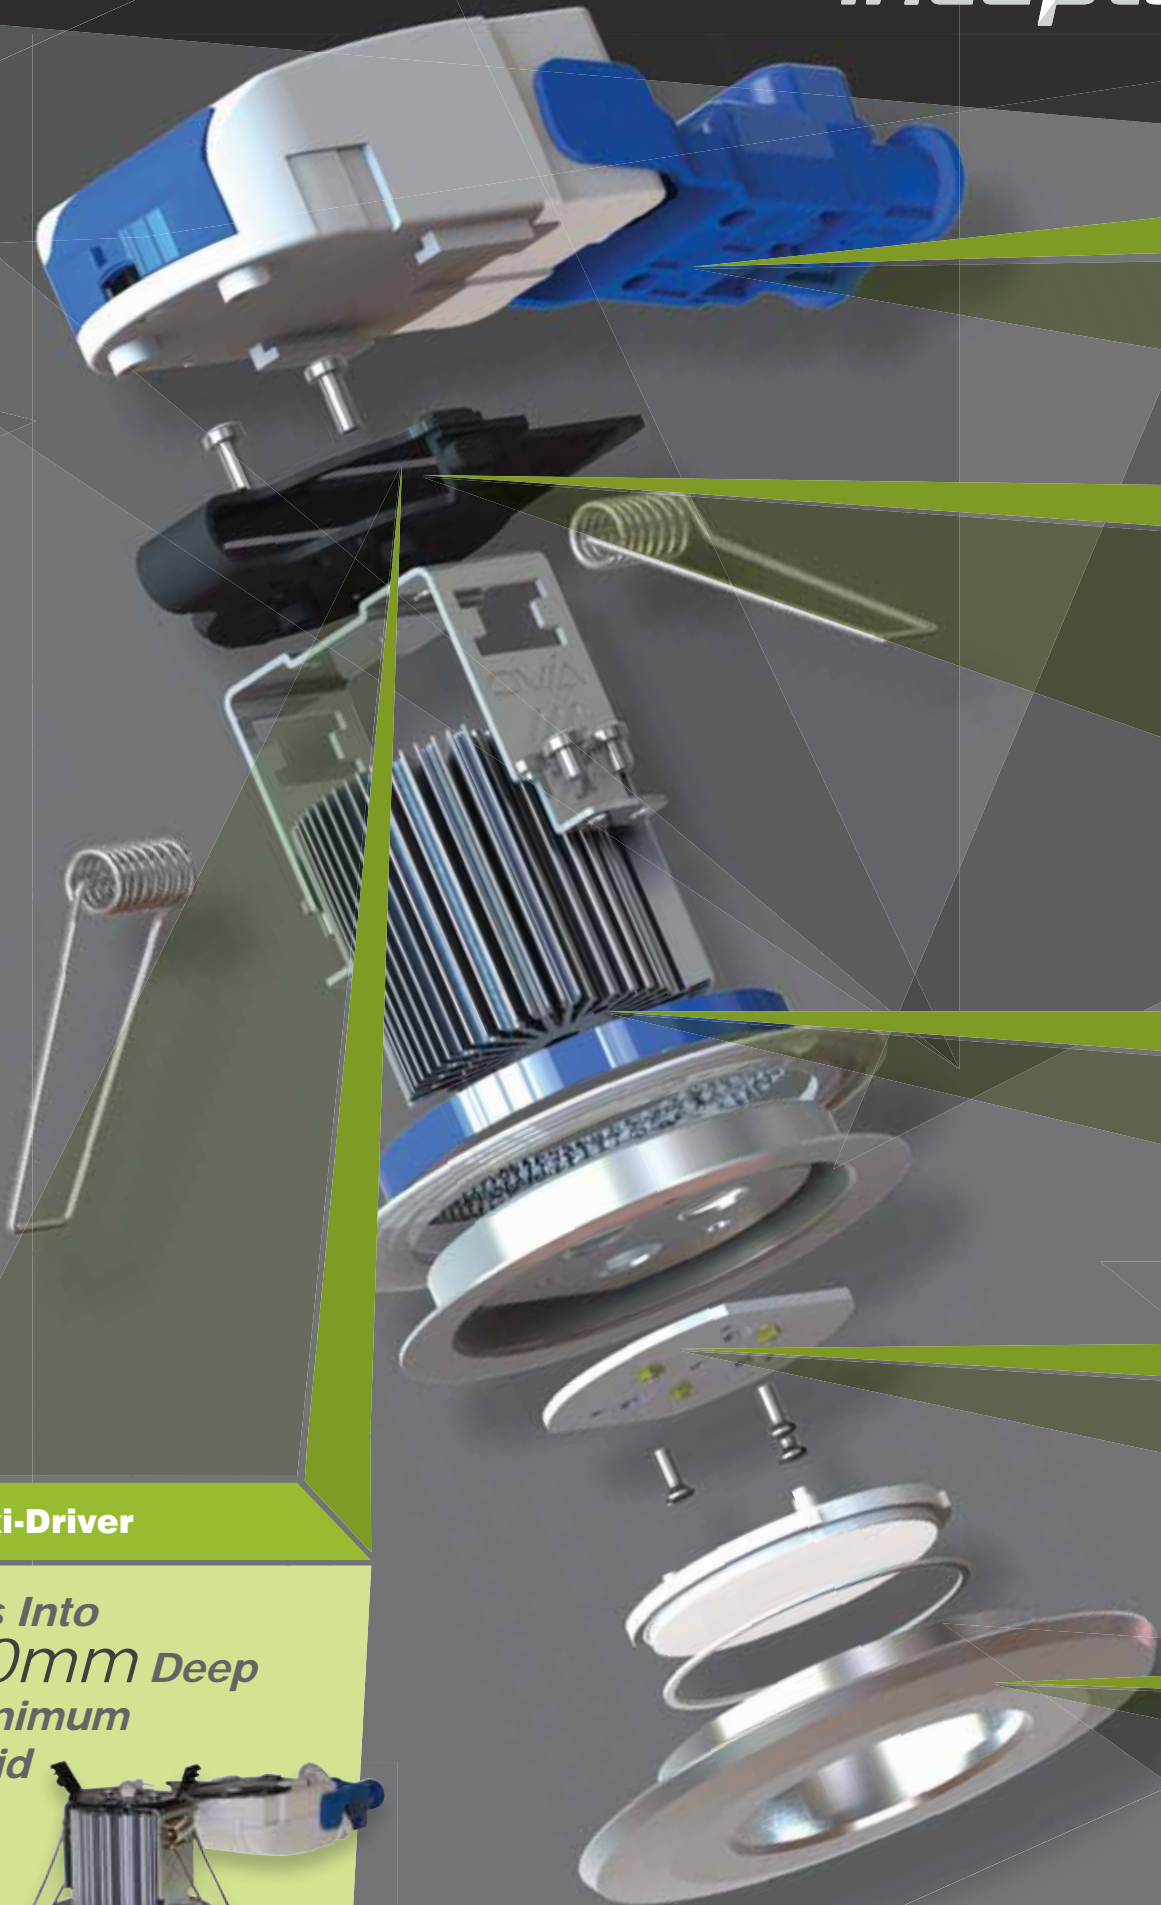

**Flexi-Driver**

*Fits Into  
60mm Deep  
Minimum  
Void*



# Features & Benefits

## Integrated **flow** Connector

Integrated **flow** Connector - For Quick connection and removal. Use with the Click Flow range of connectors, pre-wired cables and Hub (CT300).

## Flexible Driver mount

Allows the driver to be “flipped” over which allows the product to be fitted into a shallower ceiling void. There is an additional benefit to this ability... For those who have concerns about using the product in particularly warm environments; having the product fitted in its standard orientation (driver on top) heat from the LED could contribute to the temperature of the driver and in particularly warm installations this may lead to decreased driver life. However, if you flip the driver over so it's mounted beside the product, the heat that rises up from the LED's no longer rises to heat the driver, therefore protecting the life of the driver.

## Intumescent Strip

Our trademark blue strip of intumescent adds an extra barrier of protection against fire by expanding to fill the gap between plasterboard and light fitting.

## Luxeon Rebel LED's

We use Luxeon Rebel LEDs for high-quality, dependable light output. Each Rebel chip has an L70 (useful light output life) of over 80,000 hours.

## Cast Zinc Bezel

Cast Zinc for a professional appearance and plated or painted in our most popular colours: White, Chrome & Satin Chrome.

**\* Dimmable version suitable for use with selected dimmers only.**  
Please see our website or contact the technical department on 01827 63454.